

Lubricants, Sealants & Chemicals



Suction & Transfer Guns, Syphon & Lever Pumps.....	166
Grease Guns.....	167-168
Grease Systems, Pumps & Control Vales.....	169-170
Grease Couplers, Fittings & Nipples	171-172
Oil, Chemical & Fuel Pumps	172-176
Filters, Flow & Fuel Meters	176-177
Fuel Nozzles, Kits & Storage	178
Oils & Grease.....	179-182
Spray & Wire Rope Lubricants.....	182
Anti-Seize & Lanolin Based Lubricants.....	183-184
Spray Lubricants, Protectants & Sealants.....	184-187
Degreasers, Cleaners & Coolant	188-189
Cutting Fluids & Compounds, Welding Compounds...	190-191
Solvents	191-192
Foam, Gap Filler, Silicone, Sealants & Adhesives	192-195
Caulking Guns, Glue & Adhesives.....	196-197
Thread Sealants & Lockers, Retaining Compounds ..	197-198
Primers & Repair Products.....	198-203
Rubber Insertion, Gasket & Packing.....	203-205
Gasket Sealants, Compounds & O-Rings.....	206-207

Suction Gun, Transfer Gun, Syphon Pumps & Lever Pump

Suction Gun

SG/11-BL

- A rugged transfer gun designed for transferring gear oils in and out of gear boxes, transfer cases and differentials
- Deluxe lip seal provides maximum suction
- Steel barrel in premium powder coated finish
- Fully serviceable
- No priming required
- Suitable for use with non-corrosive liquids
- Comes with 300mm flexible vinyl hose
- Capacity: 500ml



68502030



Plastic Syphon Pump

SPH/1

- Easy to use, polyethylene pumps siphon liquids to lower levels than the height at which the pump is installed
- Easy to prime and start within 6–7 strokes
- Pump requires no further operation and keeps working in auto position, emptying the media being pumped
- All pumps are equipped with a vent cap on top, opening the cap stops the discharge
- Supplied complete with flexible corrugated discharge tube
- Recommended for use with water-based fluids, detergents, waxes, soaps, antifreeze, some mild acids, and other liquids compatible with pump materials of construction
- 6.5ltr/min
- 1½" bung
- Suits 5–20ltr pails
- 551mm discharge hose
- Polyethylene wetted components



68570220



Dual Direction Transfer Gun

SG/20

- Draws in and pumps out liquid in a single stroke
- Easy and safe answer to fluid transfer, especially useful in transferring media unsafe for body contact
- Non-denting heavy aluminium gun body
- Aluminium suction head and piston with Viton piston rings
- Complete with 1.2m vinyl hose on each valve
- Wetted components made from aluminium, brass, viton, PVC
- Suitable for use with fuel oils, mineral oils, synthetic and biological oils, petrol, cooling liquids, water, antifreeze, spirits and brake fluids



68502032



Plastic Lever Pump

PLP/02

- Convenient and comfortable design to pump thick oils without excessive fatigue
- Versatile for use with water based media, high viscosity oils, agricultural and select chemicals
- Built-In 2" bung adaptor and anti-siphon vent cap
- Lock nut allows for pump position to be easily adjusted
- Complete with suction tube and flexible corrugated discharge hose
- Wetted components made from polyacetal, polypropylene, polyethylene, PVC and viton
- Should only be used with non-flammable liquids and must never be used for fuel transfer or with thinners and solvents
- Delivers 500ml per stroke
- Drum capacity: 50–205ltr
- Hose: 2m x ¾" ID



68570060



Plastic Syphon Pump

- Quick action pump, easily fills or empties kerosene, light oils, gasoline and various water-based solvents
- Air vent controls siphoning
- Pumps to higher levels and siphons to lower levels
- Maximum fluid temperature: 60°C
- Wetted parts: Polyethylene
- Maximum viscosity: 500 SSU
- Flow: 26.5ltr/min
- Mounting: 2" MNPT Bung adaptor for 55, 115 and 205ltr containers
- Suction tube: 7/8" ID, 1" OD
- Suction tube length: 0.86m
- Discharge tube: 1½" ID, 1½" OD
- Discharge length: 1.2m



68570240



**Find Spill Control Waste Bags
in the Safety Equipment &
Consumables section, page 66**

Push Type Grease Gun

G6P

- For use with bulk grease only
- Steel body construction and compact in size
- Ideal for greasing impact wrenches, lawn mowers, chain saws, trailers, ATVs and other vehicles
- Comes complete with universal connector
- Max. pressure: 1,000psi (69bar)
- Bulk capacity: 30cm³



68502010

Trigger Action Grease Gun

660AN

- Capable of generating grease pressures of up to 8,500psi
- Coarse thread on barrel assembly eliminates cross threading during cartridge changeover
- Unique Twin Lock System eliminates the possibility of dummy lubrication
- Patented Ever-Flow System enables the gun to be used with thick tacky greases even at low temperatures
- Lightweight and compact aluminium die cast head assembly
- Three way loading
- Delivers up to 1.1g of grease per stroke when on the high volume setting
- High volume/high pressure setting results in quicker and more effective greasing
- One hand operation
- **Includes:** 4 jaw coupler and flexible 30mm long extension



68502036

Mini Deluxe Pistol Grease Gun

G-16/B

- Convenient one hand operation
- Powder coated finish
- Complete with 4" steel extension and 4 jaw coupler with ball check
- Cartridge capacity: 85g
- Max. pressure: 3,500psi
- Bulk capacity: 120cm³
- 0.40g/stroke
- 1/8" BSPT



68502110

Pistol Grip Grease Flexiguns™

- Pistol grip design for easy one handed operation
- Suitable for cartridge and bulk fill applications
- Heavy-duty design and construction facilitates effortless pressure building and ensures long usage life
- Lock the plunger rod into the follower for easier bleeding
- Delivery pressure up to 68,900kPa (10,000psi)
- **Includes:** Flexible 230mm high pressure extension hose and KY Supergrip™ 3 jaw coupler



K29-01



Product Code	Description	Part Number
K29-01	K29 Flexigun – Suits 450g Grease Cartridges or Bulk Filling	68502120
K32-01	K32 Flexigun – Suits 400g Grease Cartridges or Bulk Filling	68502125

Vario' Premium Pistol Grip Grease Gun

G65F-HP/B

- Ergonomic one hand operation
- Unique variable stroke mechanism for both high volume and high pressure applications
- Solid 11mm diameter piston for more grease per stroke
- Drop-resistant pistol assembly
- Robust aluminium die cast grease gun head with bulk filler
- Rolled cylinder threads offer maximum strength
- Suitable for use with NLGI 1, 2 and 3 grease
- Complete with 300mm flexible hose and professional 4 jaw coupler with ball check
- Cartridge capacity: 400g
- Max. pressure: 6,000psi
- Bulk capacity: 500cm³
- 1/8" BSPT



68502039

450g Grease Gun & Accessories Kit

660ANK2

- Includes a 660AN trigger action grease gun (4 year warranty)
- Grease pressures of up to 8,500psi (586bar)
- Delivers up to 1.1cc of grease per stroke on the high volume setting
- Heavy duty carry case protects all components from dirt and contamination
- Ideal for greasing difficult to access lube points
- Convenient on-the-go, on demand greasing solution



Includes:

- 30cm flexible extension
- 90° adaptor with coupler
- Injector needle
- Needle hose adaptor
- 3 and 4 jaw couplers



68502045

Pistol Grease Gun

G4F/PST/B

- Designed for use in confined spaces or where access to grease nipple is restricted
- Heavy duty aluminium die cast head and super strong pistol grip handle
- Robust barrel, heavy duty follower spring, CNC machined grease gun head, and large rolled threads for fast and easy re-loading
- Complete with 300mm flexible hose and professional 4 jaw coupler with ball check
- Head fitted with steel block nut
- Max. pressure: 5,000psi (345bar)
- Cartridge capacity: 450g
- Bulk capacity: 650cm³
- 1/8" BSPT



68502038

Heavy Duty Grease Gun

G4R/HD/B

- Designed for punishing day-in and day-out heavy industrial applications
- Variable stroke feature built in for use in confined areas
- High tolerance aluminium die cast grease gun head incorporates bulk loader and air bleeder valve
- Robust barrel, heavy duty follower spring, CNC machined grease gun head, large rolled threads for fast and easy re-loading
- Complete with 150mm steel extension and professional 4 jaw coupler with ball check
- Max. pressure: 10,000psi (690bar)
- Cartridge capacity: 450g
- Bulk capacity: 650cm³
- 1/8" BSPT



68502042

Leaver Action, Air Operated, Battery & Cordless Grease Guns

Lever Action Grease Leverguns™

- Suitable for cartridge and bulk fill applications
- Heavy duty design and construction facilitates effortless pressure building and ensures long usage life
- Lock the plunger rod into the follower for easier bleeding
- Delivery pressure up to 82,750kPa (12,000psi)
- **Includes:** Rigid extension and KY Supergrip™ 3 jaw coupler



K45-01



Product Code	Description	Part Number
K45-01	K45 Levergun – Suits 450g Grease Cartridges or Bulk Filling	68502130
K40-01	K40 Levergun – Suits 400g Grease Cartridges or Bulk Filling	68502135

Lever Action Grease Gun

600A

- Develops grease pressures up to 12,000psi
- Coarse thread on barrel assembly eliminates the possibility of cross threading during cartridge change over
- Delivers up to 1.6g of grease per stroke
- Patented Ever-Flow System enables the gun to handle thick biodegradable greases even at low temperatures
- Large diameter piston with a long lever travel facilitates high volume greasing
- High volume, high pressure greasing guaranteed
- Unique Twin Lock System eliminates the possibility of dummy lubrication



68502040

18V Battery Grease Gun

L-BG18V

- Battery operated grease gun for use with 450g grease cartridge or bulk filling
- Fitted with block nut and air release valve
- Develops 51,700kPa (7,500psi) and delivers 50g/min
- **Includes:** 1,000mm high pressure hose and coupler, battery charger, spare battery and shoulder strap



68502145

18V Cordless Grease Gun

670AN3

- Grease pressure of up to 8,000psi
- Delivery rates of up to 170g/min
- Second battery included
- One hour fast charge
- Remaining charge and fault indicator
- Lithium-ion battery for extended use
- Up to 24 x 450g cartridges per charge
- Ergonomic and lightweight at just 3.5kg
- The key to efficient plant and machinery greasing



68502147

Air Operated Grease Gun

PGG/4R/B

- Intermittent action providing grease discharge with every press of trigger
- Ideal for use in factory maintenance, agricultural applications, fleet service or for use on trucks connected to vehicle air brake compressors
- Each gun supplied with a male quick coupler fitting
- Air operating range: 40–120psi (3–8bar)
- Air compressor volume: 1cfm/0.026 cubic metre and above
- Complete with 150mm steel extension and professional 4 jaw coupler
- Pressure ratio: 40:1
- Air inlet: 1/4" NPT(F)
- Cartridge capacity: 450g
- Max. pressure: 4,000psi
- Bulk capacity: 650cm³
- 1/2" BSPT
- 0.90g/shot



68504210



Heavy Duty Grease Gun Holder

GGH/03

- Designed specially for use on farm and construction equipment, trailers, tractors and other automobiles in high vibration environments
- Sturdy all steel construction with a four bolt design for easy and secure mounting
- Fitted with heavy duty spring
- Suits 57 and 63.5mm diameter grease gun barrels
- Grease gun not included



68502195

Air Operated PowerPistol™ Grease Gun

K53-01

- Pistol grip design and air powered for easy one handed operation
- Suitable for use with 450g cartridges or bulk filling either manually or with J4 transfer pump
- Single shot operation results in very low air consumption
- Can be used with truck and bus brake system air supply
- Single shot operation results in more accurate grease usage
- Delivery pressure up to 41,400kPa (6,000psi)
- **Includes:** Flexible 230mm high pressure extension hose and KY Supergrip™ 3 jaw high pressure coupler



68502140



Take a look in the Power & Pneumatic Tools section for Engraving Pens, page 156, and Engraving Kits, page 146



Portable Greasing System

GS/5

- Fully portable and single person operation
- Designed for workshop environments, site applications, pick-up trucks, tractors and earth moving equipment
- Foot operated pump
- A single charge provides 30 shots of grease
- Aluminium die cast super gun has high pressure and volume settings
- High pressure setting dispenses 0.45g of grease in each shot at 10,000psi
- High volume setting dispenses 1.25g per shot
- Pump assembly is fully sealed to prevent contamination
- Complete with drum cover, rubber lined follower plate, super gun with steel extension and coupler
- Also includes 5kg plastic grease bucket and a 1.5m premium high pressure hose
- Wetted components made from aluminium, steel, brass, polyurethane and nitrile rubber
- For use with grease up to and including NLGI No. 2
- Pump length below drum cover: 197mm
- Drum cover diameter: 216mm
- Follow plate dimensions: Steel end OD: 171mm, plate OD: 206mm



68502315

Bucket Greaser

VGP/10A

- Volume grease pump designed for quick effortless greasing in applications requiring everyday lubrication such as greasing of excavators and other earth moving equipment, agricultural equipment, automotive applications etc.
- Delivers up to 9g of grease per stroke
- Fully CNC machined to very close tolerances
- Develops pressure up to 4,000psi (275bar)
- Wetted components made from steel, aluminium, brass and nitrile rubber
- Recommended for use with grease up to and including NLGI No. 3
- 10kg capacity



68502320

High Pressure Foot Operated Grease Pump

FOP/10A

- High pressure portable grease pump for quick effortless greasing in everyday lubrication such as greasing of excavators and other earth moving equipment, agricultural equipment, automotive etc.
- Hands free operation; pump operates using the foot lever, which greatly reduces effort and allows high pressure greasing with highest comfort
- Can be operated by hand when under low machinery
- Moving parts create wave action in grease, removing air pockets and eliminating the use of a follower plate
- Delivers over 2g of grease per stroke
- Develops pressure up to 8,700psi (600bar)
- Suitable for use with NLGI 1, 2 and 3 greases
- Wetted components made from steel and nitrile rubber
- 10kg capacity



68502322



Professional Grease Transfer Pump

J2-03/BL/B

- Extra heavy duty construction
- Ideal workshop tool combining economical bulk grease purchasing with the portability of a hand operated grease pump
- Suitable for bulk filling grease guns, as well as transfer of grease from large to small containers
- Solid cast aluminium pump head, ergonomic steel pump handle, solid steel drum cover with lift handle and rubber lined follower plate
- Brass piston rings for minimal wear
- Variable handle setting for increased convenience in use with light and heavy greases
- Fully sealed to prevent contamination
- Comes with female loader adaptor, suitable for 9mm straight loader fittings
- Recommended for use with grease up to and including NLGI 3
- For use with 20kg pails
- Pump length below drum cover: 310mm
- Drum cover diameter: 310mm
- Follower plate dimensions: Steel end OD: 238mm, Plate OD: 293mm, I.P. Plate: 31.4mm



68502335

P3 Powerlube™ Air Operated Grease System

P3-01C

- Premium quality, reliable 50:1 air operated greasing system
- Adjustable collar system allows use with grease pails from 16–25kg
- Quiet low air consumption air motor does not need lubrication
- Delivers up to 460g/min with grease pressure able to be boosted up to 10,000psi
- Suitable for underground mining applications
- Includes:** Lid, follower, 4m grease hose and B2 Booster grease gun



68504220

Find Lathes in the Workshop, Machinery & Construction Equipment section, pages 114–115



Air Operated Grease Pumps, Grease Lubricators & Grease Control Valves

Air Operated Grease Ratio Pump 50:1

GP1/ST/501/BSP



- World-class industrial high pressure pump with guaranteed performance and hassle-free operation
- Dispenses grease at pressures up to 50 times the air inlet pressure
- Designed to work in tough conditions. Suitable for use in industry, workshop, farm and construction applications
- All metal construction, fully CNC machined with hardened wear resistant moving parts
- Reciprocating piston-operated air motor
- Fitted with strainer at suction tube inlet providing clean grease to the bearing
- Supplied complete with drum cover, rubber lined follower plate, 2.1m of high pressure grease hose, Z swivel and professional grease control valve
- Wetted components made of steel, brass, aluminium and polyurethane
- Recommended for use with light and self-collapsing grease up to NLGI No. 2
- For use with 20kg pails
- Suction tube: 440mm
- Working pressure: 30–150psi (2–10bar)
- Max. air pressure: 150psi (10bar)
- Max. outlet pressure: 7,500psi (500bar)
- Air inlet connection: ¼" BSP(F)
- Pump outlet connection: ¼" BSP(F)
- Air consumption: 230ltr/min (61gpm)
- Grease output: 1.1kg/min
- Noise level: 81db



68504240

Composite Air Operated Grease Ratio Pump 50:1

GRP/501/04



- Operates off most small compressors
- Ideal for applications having continuous need for high pressure grease in industry, workshops and farming
- Zinc construction suitable for mining applications
- 72mm diameter air motor
- Grease strainer at suction tube inlet provides clean grease to the bearing
- Can be used without an air line lubricator
- Pressure release valve prevents both the pump and system against damage created by excessive pressure
- Comes with drum cover, rubber lined follower plate, 2.1m of high pressure hose, Z swivel and professional grease control valve
- Wetted components made of zinc, hard chrome-plated steel, brass, nitrile and polyurethane rubber
- Recommended for use with light and self-collapsing grease up to NLGI No. 2 GRP/501-04
- For use with 50kg pails
- Suction tube: 688mm
- Working pressure: 60–150psi (4–10bar)
- Max. air pressure: 150psi (10bar)
- Max. outlet pressure: 7,500psi (500bar)
- Air inlet: ¼" NPT(F)
- Pump outlet: ¼" NPT(F)
- Air consumption: 270ltr/min (72gpm)
- Grease output: 460g/min
- Noise level: 85db
- Drum cover diameter: 381mm
- Follower plate dimensions: Steel end OD: 322mm, Plate OD: 380mm, Grommet ID: 27.5mm



68504250

Alemite 180kg Air Operated Grease Pump

9950-D1



- 50:1 ratio double acting grease pump capable of delivery rates of up to 2kg/min
- Spool valve operation reduces maintenance costs
- Can service up to three hose reels
- Single shot or continuous flow hand piece provides greater lubrication options
- ¼"NPT(f) air inlet and ¾"NPT(F) grease outlet
- Modular design maximises operating time



68504252

Heavy Duty Uniquip Grease Lubricators

- Automatically dispenses the correct amount of grease to a bearing, as required
- Large grease capacity reduces the amount of time required to undertake plant and equipment lubrication
- Increases bearing life
- Eliminates grease waste and over greasing
- Prevents the loss of production time due to bearing failure caused by over or under greasing
- Forged alloy base

RF15



RF30



Product Code	Capacity	Part Number
RF15	47g	68514975
RF30	150g	68514980

Alemite Grease Control Valve

6320-3



- Heavy duty grease control valve capable of continuous flow or preset measured shots
- ¼" NPT(F) inlet thread
- The USA's industry standard grease control valve



68504270

Grease Control Valve with Booster

APG/1-4F/B



- Provides continuous flow with pistol handle fully pressed
- Pressure boost achieved through repeated actuation of the pistol handle
- Boosts line pressure from 6,000psi to 10,000psi
- Heavy duty steel construction, provides durability and longevity
- Ergonomically designed pistol handle
- Complete with 150mm steel extension and coupler
- Inlet: ½" BSPT (F)
- Outlet: ½" BSPT (F)



86410798

Heavy Duty Hydraulic Couplers

HC/12/4/B

- Suitable for hand operated and air operated grease guns
- Hardened body with double wall thickness to withstand high pressure without deformation
- Fully hardened spring steel jaws
- Hexagonal nut for easy tightening
- Fitted with ball check valve
- 3 and 4 jaw construction
- Pressure: 10,000psi (690 bar)



68510020

Hydraulic Swivel Coupler

HC/SW/3/B

- Provides effective lubrication of difficult and hard to reach grease fittings
- Swivels on a full 360° rotation and locks at any 45° position
- Fully hardened jaws for extended service life
- Hardened body and joints to withstand high pressure without deformation
- Zinc plated finish
- Spring loaded ball check valve
- 3 jaw construction
- Pressure: 7,000psi (483 bar)
- Thread: 1/8" BSPT



68510040

Button Head Coupler

HOC/1/B

- Fixed hook-on
- Zinc die cast body
- Conveniently slide over the face of the button head fitting
- Metal seal increases resistance to wear
- Pressure: 3,000psi (207 bar)
- Suits button head fitting: 5/8" (16mm)
- Thread: 1/8" BSPT



68510030

Heavy Duty Grease Hoses

- Polyamide inner tubing with polyurethane sheathing, reinforced diagonally in highly tear resistant polyester
- Heavy duty zinc plated end connections hydraulically crimped to the hose
- Ideal for use in cold weather
- Rolled threads for extra strength
- 1/8" BSPT



Product Code	Length	Inside Dia	Outer Dia	Working Pressure	Burst Pressure	Part Number
GHC-8/B	200mm	3.6mm	8.5mm	3,500psi	11,600psi	68512020
GHC/HP-12/B	300mm	4.1mm	10.8mm	5,800psi	13,775psi	68512030
GHC/HP-18/B	450mm	4.1mm	10.8mm	5,800psi	13,775psi	68512040
GHC/HP-20/B	500mm	4.1mm	10.8mm	5,800psi	13,775psi	68512045

Find all types of Bearings in the Bearings, Seals & Transmission Products section, pages 493–499



Grease Fittings

- TS16949 approved manufacturing
- Heat treated to SAE J534 specification with hardness on greasing end to a minimum of 83 on Rockwell 15N scale with a case depth of 0.13mm to 0.23mm



Product Code	Description	Size	Part Number
GFT/R/1-8/28	Straight	Taper Thread, 1/8" x 28 BSPT	68514015
GFT/R/1-8/28/45	45°	Taper Thread, 1/8" x 28 BSPT	68514025
GFT/R/1-8/28/90	90°	Taper Thread, 1/8" x 28 BSPT	68514030
GFT/R/1-4/19	Straight	Taper Thread, 1/4" x 19 BSPT	68514040
GFT/1-4/28-UNF	Straight	Parallel Thread, 1/4" x 28 UNF	68514070
GFT/6/1	Straight	Taper Thread, 6 x 1mm	68514120
GFT/8/1	Straight	Taper Thread, 8 x 1mm	68514132
GFT/8/1.25	Straight	Taper Thread, 8 x 1.25mm	68514140
GFT/10/1	Straight	Taper Thread, 10 x 1mm	68514144
GFT/10/1/45	45°	Taper Thread, 10 x 1mm	68514145

80 Piece Metric Grease Nipple Set

GFT/KIT/M-80

Includes:

- M6 x 1 thread: 20 x Straight, 10 x 90°
- M8 x 1 thread: 15 x Straight, 10 x 90°
- M10 x 1 thread: 15 x Straight, 10 x 90°



68514920

110 Piece Metric Grease Nipple Set

GFT/KIT/M-110

Includes:

- M6 x 1 thread: 30 x Straight, 20 x 90°
- M8 x 1 thread: 20 x Straight, 10 x 90°
- M10 x 1 thread: 20 x Straight, 10 x 90°



68514940

Grease Nipples, Header Blocks, Oil Cans & Pumps

80 Piece SAE Grease Nipple Set

GFT/KIT/SAE-80

Includes:

- 1/8"-27 PTF thread: 25 x Straight, 10 x 45°, 10 x 90°
- 1/4"-28 SAE-LT thread: 15 x Straight, 10 x 45°, 10 x 90°



68514910



Easy Out Tools

- Removes worn and broken grease fittings as well as re-taps holes for installing new grease fittings
- Suitable for both straight and angled fittings
- Size available to suit almost all threaded fittings



Product Code	Description	Part Number
ESO/1	Small – Hex Size: 3/8"(7mm)–3/4"(9mm) Tap Re-Threads: 1/4"–28"	68590510
ESO/2	Large – Hex Size: 3/4"(9mm)–7/8"(11mm) Tap Re-Threads: 1/2"–27"	68590520



110 Piece SAE Grease Nipple Set

GFT/KIT/SAE-110

Includes:

- 1/8"-27 PTF thread: 30 x Straight, 15 x 45°, 15 x 90°
- 1/4"-28 SAE-LT thread: 20 x Straight, 15 x 45°, 15 x 90°



68514930



Grease Nipple Thread Tester

6000

- A handy tool for quickly and easily identifying the thread type of your grease nipples and other fittings
- Made from aluminium, this low cost compact and lightweight utility tool can be stored in a handy place ready for use
- Comes complete with all the common thread sizes including BSP, NPT, UNF, BSW and Metric
- Extra holes in top corners for hanging in common areas for easy access



68514945

Grease Nipple Kits



Product Code	Description	Part Number
CA108	Imperial – Straight & Angle Nipples – 113 Pieces 15 Sizes: UNF, BSF, BSP & NPT Threads	40410150
CA109	Metric – Straight & Angle Nipples – 105 Pieces 12 Sizes: M6, M8 & M10 Diameter – Fine & Coarse Metric	40410160

Lever Type Oil Can

MP23R/FB

- All steel construction, with the body seamless drawn from tin coated sheet
- Metal pump has two ball valves for large volume delivery per stroke
- Suction valve has no spring, preventing malfunction due to sticking
- Modern and contemporary design with premium powder coated finish
- Supplied with both rigid steel and wire braided flexible extensions
- Lever type can with deluxe brass pump
- 500ml capacity
- Rigid spout: 150mm
- Flexible spout: 175mm



68560100



Header Block Kits

- Suitable for remote bearing lines up to 4m
- Allows grease points to be moved to safe and convenient locations
- **Includes:** High performance polyamide tube, four 1/2" BSP elbows, 6mm fittings and grease nipples



Product Code	Description	Part Number
6134	4 Outlet	68514950
6136	6 Outlet	68514955

Stub Oil Pump

343025

- Double acting oil pump suitable for dispensing lubricants in large installations including multiple dispensing points with simultaneous operations
- Flow rates of up to 40ltr/min
- 10:1 ratio
- Maximum oil pressure: 1,400psi (97bar)
- 1/2" BSP (F) air inlet



86412060

3:1 Air Operated Oil Ratio Pump

OP/T3/31B/BSP

- Designed to work in tough conditions and are ideal for use in industry, workshop, farm, construction or as part of the mobile oil system
- All metal construction, fully CNC machined with hardened wear resistant moving parts
- Reciprocating piston operated 63mm diameter
- Air motor stub pumps are supplied with non-return valve threaded 1" (F) for use on the bottom of the suction tube
- Pumps are single acting with discharge up to 14ltr/min
- Ideal for use with medium to high viscosity oils (up to SAE 130) for transferring over short distances (up to 30m)
- Max. oil pressure: 115psi
- Air consumption: 230ltr/min
- Wetted components made from steel, brass, aluminium, high nitrile rubber, polyurethane and turcite



68575100

Oil Piston Pump

SLP/60

- An easy to use, highly convenient, single person operation oil pump that dispenses oils with a simple press of the trigger
- Single hand operation, requires no continuous lever/rotary pumping action
- Spring loaded design that charges the pump for continuous dispensing of media with a single charge
- A single charge gives 500ml of output
- All metal construction with built in 2" male threads into the pump head
- Pump head incorporates drain back port to minimise wastage and spillage of over flown media
- Supplied complete with 5' PVC hose fitted with an oil control gun
- Designed for use with 60ltr drum
- Steel, aluminium, zinc, brass, NBR, polypropylene and PVC wetted components
- Recommended for use with engine and gear oils up to SAE 140, automatic transmission fluids



68570085

5:1 Composite Air Operated Oil Pump

ORP/51T/N

- Dispenses oils up to five times the pressure as the air inlet
- Suits most small compressors as small as 0.08m³
- Commonly used in workshops, farming, construction machinery or as a part of a mobile oil system
- Reciprocating piston-operated 72mm diameter air motor
- Non-corroding air motor design, no air line lubricator needed
- Built-In pressure relief valve
- Dual oil inlet threads, 1" NPT(F) and 1" UNEF(F)
- Ideal for use over distances up to 50m
- Comes with 2" bung nut and 1" telescopic suction tube
- Wetted components made from aluminium, zinc, steel, brass, nitrile and polyurethane rubber
- Recommended for use with oils (to SAE 140), ATF, diesel, kerosene and soft self collapsing grease
- Air inlet: ¼" NPT (F)
- Pump outlet: ½" NPT (F)
- Working pressure: 60-150psi (4-10 bar)
- Max. oil pressure: 145psi
- Max. air pressure: 150psi (10 bar)
- Air consumption: 270ltr/min
- Discharge: 15ltr/min



68575110

Plastic Oil Pump

ERP/01

- Designed for dispensing oil based fluids
- Polypropylene body, rotor and veins
- Viton shaft seal and steel hardware
- Strainer protects the pump from contaminants
- Comes with threaded polypropylene suction tube and 2" bung adaptor
- Wetted components made from polypropylene, viton and steel
- Recommended for use with oil based media, antifreeze etc.
- Do not use with water based media, acids, chemicals, solvents, lacquer, gasoline
- Delivers 5ltr per 20 turns
- Drum capacity: 50-205ltr



68570320

Piston Pump

- Polypropylene plastic drum pump with stainless steel rod
- Suitable for light oils, paraffin, alcohols, water and water-based chemicals
- Flow rate: 400ml/stroke
- For use with 60-205ltr drums



68570160

20ltr Gear Oil Drum Pump

8828N2

- Capable of delivering up to 110ml per stroke
- Comes complete with a Reike adaptor and down tube extension allowing it to be used with 20ltr drums
- Ideal pump for the transfer of engine, gear, diff and hydraulic oils in busy vehicle servicing workshops
- Drainback nozzle holster ensures that excess oil ends up back in the drum
- UV stabilised long life hose ensures a long service life
- Delivers lubricant on the down stroke



68575106

Rubber Hoses, Oil Control Guns & Pumps

C7 Multi-Purpose Gear Oil Pump

C7-01

- Suitable for pumping gear oils up to SAE 140 and transmission fluids
- Pumps approx. 100ml per stroke on the down stroke
- Features a built in nozzle holder, 1.8m delivery hose, delivery spout and a manual non-drip nozzle complete with manual shut off
- **Includes:** Three bung adaptors to suit various containers from 15–25ltr



68575050



Hydraulic Rubber Hoses

HH/1.5/1-2M/1-2M/BSP

- For use with air operated oil pumps
- Hose exceeds SAE 100 R1 specification with a working pressure of 2,200psi (150bar)
- Length: 1.5m
- Inside diameter: ½"
- Outside diameter: ¾"
- Hydraulically crimped with steel fittings with ½" (M) threads on both ends

68575120



Oil Control Gun

OGY/S/1-2R/N

- For use with air operated oil pumps up to 6:1 pressure ratio
- Gun dispenses by simple press of the trigger
- Built-in safety and continuous flow lever, and swivel threaded at inlet for easy manoeuvrability
- Slim construction
- Recommended for use with oil, gear lube and ATF
- Do not use with water based media, gasoline etc.
- Max. pressure: 870psi (60bar)
- Working temperature range: -10C–60°C
- Inlet: ½" NPT (F)
- Wetted components made from steel, nylon, stainless steel and viton

68550108



Oil Control Gun with Mechanical Meter

HG/40R/B

- Robust shock resistant design with aluminium die cast body and a soft shroud encasing the meter
- 6 digit accumulative totaliser (max. 999,999ltr) and single reset button
- Works on oval gear technology for highest accuracy and repeatability
- Two outlet positions for in-line and 90° dispensing
- Swivel with strainer built at the gun inlet
- Supplied complete with rigid steel extension fitted with automatic non-drip nozzle
- Recommended for use with engine oil, diesel oil, ATF, antifreeze, anti-boil and other oils up to SAE 140
- Wetted components made from aluminium, acetal, steel, nitrile rubber
- Flow range: 1–30ltr/min (0.26–8g/min)
- Max. pressure: 1,500psi (100bar)
- Operating temperature: 0–50°C
- Inlet: ½" BSPT (F)

68550110



Front Action Barrel Pump

A2H/BL

- Unique front action operation
- Makes pumping easy and allows the pump to be used on barrels placed in corners and other inaccessible areas
- Heavy duty aluminium die cast pump head incorporates 2" bung threads
- Brass piston rings for increased life
- No riveted parts, allows 100% serviceability
- Built-in nozzle holder for convenient storage of discharge hose
- Includes 1.8m PVC nitrile delivery hose with metal nozzle, spring and hose clamp
- Comes complete with telescopic suction tube for use on 50–205ltr drums
- Delivers 250ml per stroke
- Wetted components made from steel, aluminium, brass, NBR and PVC nitrile
- Recommended for use with diesel, kerosene, heating oils, motor oils, lubricating oils (up to SAE 90), and other non-corrosive media
- Do not use with water based media, antifreeze, solvents, acids, and gasoline etc.

68570140



Ezee Flo Pumps

- Versatile hand lift pump with plastic pull out Rieke® spout engineered for trouble free use on 20ltr containers
- Heavy duty steel suction tube, with the pump head made from high density polyethylene
- Interchangeable bung adaptors
- Pump length can be extended by 19mm for use on high depth containers, by conveniently sliding on a special plastic extension at the suction end
- Wetted components made from steel, polyethylene, derlin, PVC* (*Only on pumps supplied with hose)
- Recommended for use with engine oils, gear oils, diesel, 100% antifreeze and light fuel oil
- Do not use with water based and other corrosive media
- Pump length: 325mm

EZF/9



Product Code	Description	Part Number
EZF/10	With Rigid Steel Spout	68570020
EZF/9	With 48" Flexible Hose & Spout	68570040

Rotary Chemical Pump

PRP/01

- Designed for use in applications where a cast iron or steel barrel pump cannot be used
- Glass filled polypropylene body with Rytan veins
- Viton seals and stainless steel hardware
- Strainer protects the pump from contaminants
- Comes with threaded polypropylene suction tube and two 2" bung adaptors for use on both plastic and metal drums
- Wetted components made from polypropylene, Rytan, viton and stainless steel
- Recommended for use with water based media, antifreeze, Urea, Adblue, DEF, Benzene, Detergents, Glycerine, acids, chemicals and all petroleum based products
- Do not use with acetone, lacquer, mineral oils, solvents and turpentine
- Delivers 5ltr per 20 turns
- Drum capacity: 50–205ltr

68570325



High Speed Rotary Pump

RP99ZB

- Aluminium alloy drum pump
- Suitable for fuels and low viscosity oils
- Has both clockwise and counter-clockwise operation
- Flow rate: 1ltr/stroke
- For use with 60–205ltr drums



68570360

Cast Iron Rotary Barrel Pump

GNB-25T/SPL

- Features dual directional operation which allows the pump to both empty and refill containers
- Extremely heavy duty
- Sturdy cast iron body with precisely machined cast iron vanes for better draw and smoother delivery
- Comes with suction tube, 2" cast iron bung nut and discharge spout
- Wetted components made from steel, cast iron and NBR/Viton
- Recommended for use with diesel, kerosene, heating oils, motor oils, lubricating oils (up to SAE 90), and other non-corrosive media
- Do not use with water based media, antifreeze, solvents, acids and gasoline
- Delivers 5ltr per 20 turns
- Barrel capacity: 50–205ltr
- Pump inlet: 1"
- Weight: 6.6kg



68570340

High Speed Rotary Pump with Fuel Filter

- Commonly used for dispensing or transferring low viscosity and non-corrosive petroleum based fluids, such as petrol, diesel, kerosene, lube, fuel, machine oil, etc.
- Maximum viscosity: 500 SSU (or SAE 30)
- Flow rate: 1ltr/stroke
- For use with 60–205ltr drums
- Comes with filter and hose assembly



68570365

Rotary Booster Pump 3:1

RB/3H

- Provides high volume fuel dispensing
- For every complete handle turn, the rotor turns 3 times
- Ideal for construction sites, workshops, aviation, farms/ranches, boats and more
- Die cast aluminium construction
- Sintered gear driven die cast zinc rotor and vanes
- 1.8m delivery hose with metal nozzle
- Wetted components made from aluminium, zinc, steel, NBR and PVC nitrile
- Recommended for use with gasoline, diesel fuel, kerosene and lubricating oils (up to SAE 30)
- Do not use with corrosive liquids, solvents, acids and alkalis
- Delivers 205ltr in 3 minutes
- Drum capacity: 50–205ltr



68570380

Quart/Litre Stroke Pump

QSP/01

- Heavy duty industrial pump
- Provides an economical way of dispensing exact quantities of media per stroke
- Extremely useful in applications requiring metered delivery
- Operates on a precision rack and pinion mechanism
- Built in 2" bung adaptor
- Comes with telescopic suction tube
- Spring loaded drain back tube
- Lockable handle for security while not in use
- Lock nut for positioning the pump outlet in any direction
- Wetted components made from steel, aluminium, nitrile rubber and acetal
- Recommended for use with gear and lube oil, petroleum based media, diesel and kerosene
- Do not use with water based and other corrosive fluids
- Delivers 1ltr/1 quart per stroke
- Barrel capacity: 50–205ltr



68570350

GT RAPID FLOW High Flow Rotary Fuel Pump

- Rotary bi-lobed diesel fuel pump
- Offers delivery in both directions and easy self-priming feature
- For 60 and 205ltr drums
- Delivers up to 100ltr/min, depending on viscosity
- Suitable for all fuels
- Includes: 2" bung nut, two piece suction tube, 2m delivery hose, nozzle, nozzle holder and strainer



VA-01



GT-01



Product Code	Description	Part Number
GT-01	GT RAPID FLOW High Flow Rotary Fuel Pump	68575825
VA-01	VA 10um Fuel Filter with Fittings to Suit GT-01	73301095

Fuel Pumps, Spout & Filters

Double Diaphragm Fuel Transfer Pump

DPP/1

- Ideal for use where compressed air and power is not easily available, such as farms, ranches and construction sites
- Stainless steel piston and fuel resistant hi-nitrile rubber diaphragm
- Includes a 2" die cast bung adaptor and extra heavy duty steel handle with security locking latch
- Complete with telescopic suction tube with non-return valve
- Wetted components made from aluminium, steel, stainless steel, poly acetal and NBR
- Recommended for use with gasoline, diesel fuel, fuel oil, motor oil and other light petroleum products
- Do not use with corrosive liquids, solvents, acids, alkalis etc.
- Delivers 800ml per stroke
- Drum capacity: 50–205ltr



86412085

GPI Diesel Fuel Drum Pumps

- Gear type pump with a heavy duty cast aluminium body
- Can operate outdoor, year round with an operating temperature range of -29°C to +52°C
- Total lift capacity of 7.6m
- Duty cycle of 30min on, 30min off
- Max. flow rate: 49ltr/min
- Auto nozzle
- Dry prime of 1.7m
- In line circuit breaker prevents motor burnout
- Suitable for diesel fuel transfer only
- **Includes:** 4.6m of battery cable, 3m of antistatic delivery hose and heavy duty nozzle and lockable nozzle holster



M150SA

Product Code	Voltage	Current Draw	Part Number
M150SA	12V	8amp	68575821
M240SA	24V	9amp	68575810

Heavy Duty High Flow Electric Fuel Pump

FPM/12/HF


- Heavy duty industrial grade high flow fuel pump designed for heavy duty usage in agricultural, construction, automotive and industrial applications
- Rain and weather proof for tough outdoor use
- Lightweight yet strong, non corroding
- Aluminium die cast construction geared pump design using precision sintered metal gears
- Geared construction makes the pump tolerant to contaminants in fuel; in addition to offering tremendous suction and minimal noise
- Duty cycle: 30min on/30min off
- Flow rate: 20ltr/min
- Wetted components made from aluminium, steel, cast iron, nylon, NBR, zinc, viton, polypropylene and PVC
- Recommended for use with gasoline, diesel, E15 fuel, kerosene, bio diesel (B20)



68575820

Spout for Rotary Pump

- Used for high speed rotary pumps to attach inline filter
- 1" BSP x 1" NPT
- 90° elbow

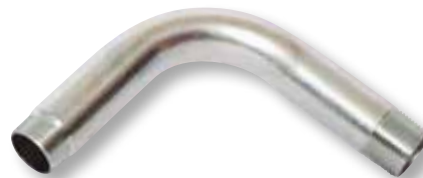

68595200

Fuel Filter

FA2N

- Fuel filter suitable for use with gravity or with hand, air or electric drum pumps
- Features a 10 micron fuel filter element, a drain cock and a replaceable clear plastic bowl
- 1" BSP inlet and outlet
- Replacement elements available



74974252

Fuel Filter for Diesel & Kerosene

FFL/02/BSP

- Durable and lightweight design for easy installation
- Rust and weather resistant
- Filters particles at a gravity flow of 19ltr/min with a 600mm head
- Filter element has 366 square inches of filtering surface
- Translucent polypropylene bowl allows for a visual check of the filter element and provides easy removal of sediment and water
- Water block filter element also available that separates water from fuel
- Wetted components are made from aluminium, polypropylene, NBR, steel, paper element, nylon, brass
- Recommend for use with gasoline, diesel fuel and kerosene
- Do not use with water based products, gasohol, aviation fuels and racing fuels
- Filter element: 10um
- Max. working pressure: 150psi (10 bar)
- Inlet/outlet: 1" BSP(F)



68525100

Replacement Filter Elements

- Suits Fuel Filter (FFL-02)



Product Code	Description	Part Number
FF/FFL/10-WB	10um Water Block Filter	68525110
FF/FFL/10	10um Filter	68525115

Diesel Filter Water Separator

- Can be used in trucks, buses and generators
- Working pressure: 15psi/103kPa



Max. Flow Rate	Part Number
227ltr/hr	66560050
680ltr/hr	66560100

Filter Element

- Waterproof, rust-proof and dirt-proof
- Designed to repel water and contaminants to avoid damaging engine components
- Metal and plastic housing
- High efficiency filters with a large dust-holding capacity
- 240(l) x 113(dia.)mm



Description	Part Number
Suit Filter 500MP	66560110
Suit RC100FG Type Separator	66560120

Flow Meter

MF/M10/B

- Metal case
- Precision
- Suit petrol and diesel MF/M10,
- 1" BSP



68520035



Mechanical Fuel Meter

FM-100/0-1/BSP

- Extremely compact, yet easy to read
- Robust aluminium die construction
- 3 port design which allow the meter to be fitted in-line or with the inlet and outlet ports at right angle
- Nutating disc mechanism offers high tolerance to fuel contamination
- For use with electric fuel pumps or gravity flow (with a minimum gravity head of 4")
- Register cap can be easily removed and rotated to every 90° orientation for display reading
- Easy user re calibration
- Works with both fuels and oils
- Recommended for use with diesel, gasoline, biodiesel, low to medium viscosity oils
- Do not use with water based media
- Wetted components made from aluminium, poly butylene terephthalate (PBT), viton and stainless steel



68520030



Mechanical Fuel Meter

51008

- Suitable for the metering of petrol, diesel fuel and kerosene
- Accurate between flow rates of 20ltr/min to 120ltr/min
- Mechanical gear meter accurate to $\pm 1.0\%$
- Maximum working pressure: 145psi (10bar)
- Field calibration possible
- 1" BSP(F) inlet and outlet ports
- Maximum batch total 999ltr
- 6-digit cumulative total display
- Suitable for gravity feed or pump applications



68520020

GPI In Line Electronic Fuel Meter

01A12LM

- Suitable for petrol, diesel fuel and kerosene
- Designed for outdoor, year round use on gravity feed or fuel transfer pumps in the 10ltr/min to 100ltr/min flow range
- Ideally suited for use between pump hose and fuel nozzle
- Maximum batch total: 9,999ltr
- Maximum cumulative total: 9,999ltr
- Turbine type meter accurate to $\pm 2.5\%$
- 1" BSP(F) inlet/outlet
- Maximum working pressure: 300psi (21bar)



68520025

Electronic Oil Meter

OM-20/1-2/BSP

- High pressure positive displacement meter suitable for in-line and end of line applications
- Oval gear mechanism for optimum accuracy
- Electronic display using two 1.5V batteries
- Robust aluminium die cast construction
- Measures in litres, quarts, pints and gallons
- Easy user re-calibration
- Threads: $\frac{1}{2}$ " BSP(F)
- Wetted components made from aluminium, stainless steel, nitrile rubber and POM
- Recommended for use with oils with viscosity up to 5,000cSt, diesel, biodiesel
- Do not use with water based media, gasoline etc.



68520040

240V Oil Transfer Tank Pump

334900

- Suitable for the transfer of engine, gear, diff and hydraulic oils
- Flow rates up to 25ltr/min
- $\frac{3}{4}$ " BSP inlet and outlet
- Vane type pump with sintered steel rotor and resin vanes
- Continuously rated with pressures up to 85psi




74930088

Tank Pump, Fuel Nozzles, Fuel Storage & Dispensing Kits & Tanks

Manual Fuel Control Nozzle

FCN/S/O-1/O-1/BSP

- For use with electric fuel pumps and gravity feed applications
- All metal aluminium construction
- Fitted with continuous flow switch and hose swivel at inlet for increased manoeuvrability and convenience
- Designed for minimal back pressure and reduction in flow
- For use with diesel, kerosene and petrol
- Wetted components are made from aluminium, steel, nylon, nitrile rubber
- Spout: 160mm
- Inlet: 1" BSP(F)
- Outlet OD: 25mm

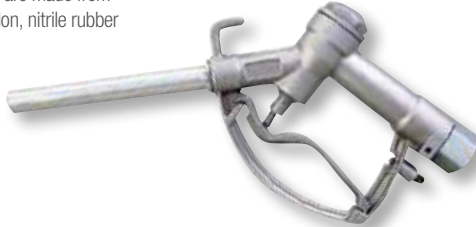

68550010



400ltr Diesel Fuel Storage & Dispensing Kit

40040PA

- 400ltr capacity polyethylene tank cannot dent, scratch or corrode
- Tank baffles aid vehicle stability
- Pallet lift points and recesses for tie down straps on the tank aids handling and installation
- Auto nozzle
- Max flow rate: 50ltr/min
- Tank dimensions: 800(w) x 1,630(l) x 635(h)mm
- **Includes:** 12V pump, anti-static fuel delivery hose, 2m battery cables and dispensing nozzle



62022100

Manual Fuel Nozzle

52007

- Suitable for gravity feed applications and applications including pressures of up to 140psi (10bar)
- Plastic shroud protects the nozzles trigger assembly and the users hands
- The lock in the open position feature saves the user time
- Hanging clip helps to reduce the possibility of diesel fuel contamination and nozzle damage
- Ideal for farm tank applications
- Max. flow rate: 150ltr/min
- Not suitable for unleaded
- **Includes:** 1" BSP swivel



68550020



600ltr Diesel Fuel Storage & Dispensing Kits

60080P

- 600ltr capacity polyethylene tank cannot dent, scratch or corrode
- Tank baffles aid vehicle stability
- Pallet lift points and recesses for tie down straps on the tank aids handling and installation
- Manual nozzle
- Max flow rate: 80ltr/min
- Tank dimensions: 800(w) x 2,400(l) x 635(h)mm
- **Includes:** 12V pump, anti-static fuel delivery hose, 2m battery cables and dispensing nozzle



62022103

Tank Truck Fuel Nozzles

- High flow refuelling nozzles for diesel and unleaded applications
- Flow rates from 75ltr/min to 300ltr/min
- Automatic and manual shut off option
- Also available with various swivel combinations upon request



Product Code	Description	Size	Part Number
1144DBSPT	Pressure Nozzle Auto Shut-Off with Spout	1¼" BSPT	62022105
1124DBSPT	Pressure Nozzle Auto Shut-Off with Spout	1½" BSPT	62022106
114DBSPT	Pressure Nozzle Bulk Delivery with Spout	1¼" BSPT	62022107
112DBSPT	Pressure Nozzle Bulk Delivery with Spout	1½" BSPT	62022108
DFN100HF	Fuel Nozzle High Flow 30gal/min	1" NPT	62022109
DFN100	Fuel Nozzle 20gal/min	1" NPT	62022110

12V Refuelling Kit

52000

- Maximum head capacity: 15m
- Self priming rotary vane pump includes a built-in bypass
- Duty cycle of 30min on, 30min off
- Suction capacity: Up to 2m
- Max. flow rate: 50ltr/min
- Ideal for intermittent diesel refuelling applications
- **Includes:** 4m anti-static fuel delivery hose, 2m battery cable, a stainless steel and brass fuel filter and a manual nozzle



68575822



Twin Skinned Tanks

- Consists of an internal HDPE tank surrounded by an integrated galvanised sheet steel bund
- Suitable for the storage of fresh oil, waste oil and diesel fuel
- Low centre of gravity for stability and ease of handling
- Integrated pallet for driving under with a forklift or hand forklift from any of the four sides
- 2" BSP (F) inlet ports
- Standard accessories include: filling level indicator, optical leakage detector and convenient carry handles
- Providing a practical and economical solution to the EPA's environmental concerns legislation
- Air breather available as an accessory



Product Code	Capacity	Dimensions	Part Number
75460	400ltr	730(l) x 700(w) x 1,170(h)mm	62022125
73920	1,000ltr	1,280(l) x 770(w) x 1,420(h)mm	62022130
75490	1,500ltr	1,630(l) x 770(w) x 1,950(h)mm	62022135

For Fuel Transfer Hose Assemblies head to page 438 in the Hydraulics, Valves, Hoses & Fittings section



Air Tool Oil

- Suitable for oiling of air tools
- Viscosity 32 @ 40°C



Size	Part Number
250ml	70095360
1ltr	70095362

Breaker & Hammer Air-Oil

820205102054

- For use with pneumatic breakers and hammers
- Readily biodegradable
- Anti-freezing properties
- Eliminates the need of a water separator
- 1ltr



76590560



Hydraulic Oil

BHV32-5

- For all hydraulic pumps, cylinders and jacks
- Includes anti-foam, anti-rust and low temperature additives
- ISO grade 32
- 5ltr



70070010



SynthPlus Chain Oil

- High-performance lubricant is extremely suitable for all moving saw chains
- Effectively protects saw chains from wear
- High temperature resistance, cutting attachments are optimally protected even from short-duration maximum thermal loads
- Smoking is inhibited
- Even at temperatures down to -20°C, STIHL chain lubricant retains its outstanding flow properties
- Selected additives prevent resinification of the cutting attachment and other treated parts



Product Code	Size	Part Number
7004 871 0262	1ltr	70095120
7004 871 0263	4ltr	70095130
7004 871 0052	20ltr	70095140

2 Stroke Oil

- Specially developed lubricant for air-cooled two-stroke engines
- Can be mixed with leaded or unleaded petrol
- The formulation utilises a mixed additive system to ensure a minimal ash deposit formation
- Contains diluent, making it easy to mix with fuel
- Controls corrosion excellently
- Minimal ring wear and piston scuffing
- Cleans burning, assisting in maintaining cleaner combustion chambers, ports and mufflers



Product Code	Size	Part Number
0781 319 8401	100ml	70090018
0781 319 8411	1ltr	70090028
0781 319 8433	4ltr	70090030
7004 871 0039	20ltr	70090040

Shell 2T Two Stroke Engine Oil

- Quality oil specifically blended for all standard two-stroke gasoline engines
- Based on a high viscosity mineral oil, it contains carefully selected additives to provide long and trouble-free performance



Product Code	Description	Size	Part Number
300010879	2T FA C6	1ltr	70090132
300011820	2T FA C3	5ltr	70090134

Shell Tellus S2 V 68 – Hydraulic Oil

- Uses a unique additive technology to deliver an oil life over twice the industry standards, excellent pump protection and high efficiency levels
- It is a fluid you can rely on in outdoor or cold environments as it has been designed to have a wide operating temperature range



Product Code	Size	Part Number
300011381	20ltr	70070012
300011380	209ltr	70070014
300011379	1,000ltr	70070016

Control those spills!
Grab some Portable Bunding from page 67 in the Safety Equipment & Consumables section

Compressor & Engine Oils

Shell Corena S2 P 68 – Compressor Oil

- Is a premium quality reciprocating air compressor lubricant
- It is based on a blend of specially selected base oils to provide a level of performance approaching that of synthetic oils
- May be used in breathing air compressors, provided subsidiary clean-up apparatus is used to ensure that the air produced is fit for breathing



Product Code	Size	Part Number
300011313	20ltr	70020160
300011312	209ltr	70020162

Shell HX7 10W-40

- Longer protection thanks to enhanced oxidation resistance
- Active cleansing and protection for your car
- Up to twice as effective at removing sludge as a normal mineral oil
- It offers up to 19% more protection than other synthetic leading brands tested
- Improves fuel efficiency
- Maintains viscosity and stays in grade throughout the oil-change interval
- Helps reduce oil volatility and therefore oil consumption and the need for top-up
- Smoother, quieter drive



Product Code	Size	Part Number
300012013	1ltr	70030025
300012085	5ltr	70030026
300012084	20ltr	70030027
300012083	209ltr	70030028

Shell Rimula R4 X 15W-40

- Shell Rimula R4 X technology is designed to adapt and protect under the full range of conditions found in modern engines
- Better protection for engines with EGR
- Protective power
- Exceptional soot control
- Viscosity increase at high soot levels against the API CI-4 test limit
- Oxidation control



Product Code	Size	Part Number
300012125	5ltr	70030220
300012126	20ltr	70030230
300012124	209ltr	70030250
300012131	1,000ltr	70030255

Shell Rimula R4 L 15W-40 – Heavy Duty Diesel Engine Oil

- Shell Rimula R4 L low emissions protects against acid/corrosion, dirt/deposits and wear
- Provides excellent rocker cover cleanliness even after 750,000km on-highway service
- Provides visibly less injector screw wear compared to a competitor oil
- Enhanced through the use of high quality Group II base oils
- Virtually sludge-free



Product Code	Size	Part Number
300010731	5ltr	70030720
300010752	20ltr	70030730
300010751	209ltr	70030732
300010804	1,000ltr	70030734

Shell Spirax S2A 80W-90 & 85W-140

- High quality GL-5 axle oil that is blended for use in a wide variety of automotive axle units subjected to heavy conditions

Suitable for:

- Automotive transmissions, differentials
- Moderate to heavily loaded gear sets in stationary and ancillary equipment
- Hypoid gear axles
- Motorcycle gear units separate from the engine
- Other automotive transmission units operating under high speed/shock load, high speed/low torque and low speed/high torque conditions



Product Code	Description	Size	Part Number
300011354	80W-90	20ltr	70050126
300011353	80W-90	209ltr	70050128
300011359	85W-140	20ltr	70050130
300011358	85W-140	209ltr	70050150

Can't find what you are looking for?

Contact us at one of our 7 locations across Papua New Guinea and the Solomon Islands



BISHOPS

sales@bishopbros.com.pg

Shell Gadus S2 V220 2

- Full extreme pressure, multi-purpose grease that provides good wear protection and bearing life
- Widely recognised and listed by leading equipment makers
- Reliable protection
- Wear protection
- Long grease life
- System efficiency



Product Code	Size	Part Number
300011613	450g	70060154
300011612	18kg	70060150
300011610	180kg	70060152

Shell Gadus S2 V1000 AD 2/C12

300011620

- High performance grease for the lubrication of bearings subjected to the most arduous conditions
- It is based on heavy duty part synthetic base oils and a mixed lithium/calcium soap thickener
- Contains extreme-pressure, anti-wear, anti-corrosion and adhesion additives
- The addition of molybdenum disulphide provides additional resistance to shock loading
- 450g



70020164

Shell Gadus S3 V220 C 2

- Full extreme pressure, multi-purpose grease that provides good wear protection and bearing life
- Widely recognised and listed by leading equipment makers
- Significantly better corrosion protection
- Premium, high-temperature, extreme-pressure, multi-purpose grease
- Red lithium complex
- Gadus S3 V220 C provides EP protection for bearings
- Over 100 hours of bearing life during severe 140°C testing



Product Code	Size	Part Number
300011645	450g	70060010
300011648	18kg	70060012
300011646	180kg	70060014

Type "A" Grease

- A natural anti-seize, lubricant and protectant that works in harsh environments
- Assembly lubricant
- Di-electric grease
- Biodegradable, non-toxic, food grade



Product Code	Size	Part Number
GS\250T	250ml Tube	32003138
GS\0500	500ml	32003140
GS\0001	1ltr	32003145
GS\0004	4ltr	32003150
GS\0020	20ltr	32003155

Graphite Powder

- Ultra-fine dry lubricant
- Suitable for use on oil-based products that attract dust
- 35g puff pack



32418005

Multi-Purpose Grease

0781 120 1109



- This grease, formulated for hedge trimmer and electric saw gear gears, adheres well to metal surfaces and thus provides extremely good protection from wear, even in extreme summer or winter temperatures
- Thanks to its high resistance to aging it retains its lubricating properties for a long time
- Excellent adhesion (grease remains at the lubricating points, even in exposed gears)
- Oxidation-stable
- Water resistant
- Ideal for all exposed gears on hedge trimmers and electric saws
- Reduces wear
- Protects from corrosion
- Can also be used as a universal grease
- 80g



70060005



Go back to pages
167–168 to find Lever,
Air Operated and Push
Type Grease Guns

Rubber Grease, Spray Lubricants & Wire Rope Lubricants

PBR Rubber Grease

- High performance castor oil based grease
- Suitable for the workshop
- Preserves and lubricates plastics, rubber and parts such as O-rings, valves and seals
- 110g tube



70520010

Wire Rope Spray

RY452412

- Semi-fluid grease spray containing molybdenum disulphide
- Rapidly penetrates the rope core providing protection against wear and corrosion
- Suitable for use on dock yard and mobile cranes, chair lifts, slipways and flying foxes
- 300g aerosol



32220096

Wet Film Assembly Spray – HE50

RN501516

- Oil dispersion containing 50% molybdenum disulphide
- Minimises scuffing and bearing 'pick up' during initial operating period or assembly of machined components
- Suitable for engines, gearboxes, cylinders, bearings and press fitted components
- 350g aerosol



32003015

Fluid Wire Rope Grease – RD205

RY453321

- Fluid grease containing molybdenum disulphide
- Powerful dewatering additive allows application to wet ropes
- Suitable for wire ropes, dockyard cranes, cranes, chain lifts, flying foxes and slipways
- 20ltr



70060200

Chain & Drive Spray

RY442352

- Corrosion preventative chain oil containing molybdenum disulphide
- Easy to apply aerosol designed to penetrate pins and bushes of roller chains ensures minimum wear of chains and sprockets
- Suitable for use with drive, steering, conveyor, hoist, forklift and motorbike chains
- 300g aerosol



32222250

Wire Rope Lube

HW\RL20-CUBE

- Penetrates, lubricates and protects wire ropes working in a corrosive environment, such as offshore, construction and mining
- ideal for use around waterways and environmentally sensitive areas
- 20ltr cube



32003160

Open Gear Spray

RY462402

- Grease lubricant in a convenient aerosol containing molybdenum disulphide
- Designed for lubrication and protection of open gears
- Suitable for open gears, worm gears, crown wheels, lead screws, rack and pinions
- 300g aerosol



70050710

Get cutting with Chain Saws in the
Power & Pneumatic Tools section,
pages 132–133



Loctite Silver Grade Anti-Seize

- Heavy duty, temperature resistant, petroleum based lubricant compound fortified with graphite and metal flake
- Inert, will not evaporate or harden in extreme cold or heat
- For use in assemblies up to 870°C
- Recommended for general purpose machinery and bolt assembly, close tolerance assembly and fine threads and snug slip fits

LOCTITE



Product Code	Size	Part Number
944870	20g Stick	32410198
76756	175g Aerosol	32410200
76732	236ml Brushstop	32410208
76741	250g Tube	32410210
76769	500g Brushstop	32410212
76731	5kg Bucket	32410225

Loctite Heavy Duty Anti-Seize

51606

- Metal free formulation provides outstanding lubrication to all metals including stainless steel, aluminium and soft metals up to 1,315°C
- Recommended for OEM specified turbine studs and bolts, ethylene and acetylene piping, petrochemical plants and environments prohibiting the use of copper

LOCTITE



32414116

Molykote 1000 Anti-Seize

- Lead and nickel-free solid lubricant paste
- Used to reduce wear and optimise friction of metal-to-metal joints
- Provides good protection against corrosion under high loads and a wide range of temperatures
- Enables non-destructive dismantling
- Composition: Solid lubricants, mineral oil, thickener and powdered metal
- Temperature range: -30°C–650°C
- 450g



32410120

Stop-Seize Nickel

D19030

- Heavy duty, high temperature, water-repelling compound that resists corrosion and galling and reduces friction and wear in heavy pressure applications
- Suitable for use with stainless steel fasteners, industrial fasteners, valve assemblies, slides, flanges, bushings, guide pins and spindles
- 500g

Devcon



32410230

Loctite 771 Nickel Anti-Seize

39163

- Copper free formulation with extreme chemical resistance, recommended for stainless steel and other metal fittings
- Prevents corrosion, seizing and galling in harsh chemical environments at temperatures to 1,315°C
- Recommended for chemical plants and oil refineries, water and sewage plants, environments where a 'clean' inert lubricant is needed

LOCTITE



32414114

Stop-Seize Copper

D19020

- Heavy duty, high temperature, water-repelling compound that protects against seizure of metal parts
- Suitable for use with valve assemblies, conveyors, flange gaskets and studs, piping, bushings, compressors, boiler fittings and heat exchangers
- 500g

Devcon



32410220

Loctite C5-A Copper Anti-Seize

51007

- Exclusive formula suspends copper and graphite in a high quality grease
- Protects metal parts from rust, corrosion, galling and seizing at temperatures to 982°C
- Recommended for nuts, bolts and studs, fittings and shafts, machine surfaces, fittings on steam turbines, pumps and valves, flanges, extruders and dies

LOCTITE



32414112

Release Agent Concentrate

- Lanolin based, water soluble, concentrated concrete release agent
- For concrete formwork (mix at 1:6 parts water)
- Also suitable as a tilt panel bond breaker and precast mould oil
- Provides lubrication and corrosion protection for jacks and fittings (mix 1:4 parts water)

Lanotec



Product Code	Size	Part Number
RA\0003	2.9ltr	32003120
RA\0005	5ltr	32003125
RA\0020	20ltr	32003130

Lubricants

General Purpose Liquid Lanolin

- For general lubrication and corrosion protection
- Penetrant, frees up rusted parts
- Lubricant for drilling, cutting and machining
- Protection of electrical equipment – non-conductive to 70kV



Product Code	Size	Part Number
GPVP-0400	400g Aerosol	32003040
GPSP-0750	750ml Spray Pack	32003050
GPV0005	5ltr	32003065
GPV0020	20ltr	32003060

Heavy Duty Liquid Lanolin

- Lubrication and protection of moving parts in corrosive environments
- For mining, marine and heavy transport
- Perfect for wire rope slings and all industrial chains (forklift)
- Protection of electrical equipment – non-conductive to 70kV



Product Code	Size	Part Number
HDVP-0400	400g Aerosol	32003070
HDSP-0750	750ml Spray Pack	32003080
HDV0005	5ltr	32003095
HDV0020	20ltr	32003090



Find Wire Rope in the Material Handling & Lifting section, page 82 and 90–91

WD-40 Multi-Use Product

- Stops squeaks
- Drives out moisture
- Cleans and protects
- Loosens rusted parts
- Frees sticky mechanisms
- 360° valve allowing spray at any angle



Product Code	Size	Part Number
61104	425g Aerosol	32004200
61114	4ltr Liquid	32004202

WD-40 Specialist High Performance Silicone Lubricant

21101

- Non-staining, hard working formula doesn't attract dirt
- Prevents parts from sticking
- Waterproofs and protects against moisture
- Temperature range: -40°C to +200°C
- Suitable for use on metal, plastic, rubber and wood
- Ideal for guide rails, pipes, hoists, hinges, belts, bearings, linkages, tools, valves, locks and doors
- 300g



32004210

CRC 5.56

- CRC 5.56 is a multi-purpose product with superior penetrating power that breaks through rust and corrosion while it clears away scale and dirt
- Lubricates for smooth action, protects metals against corrosion displaces moisture to help start wet engines



Product Code	Size	Part Number
5028	175g Aerosol	32002270
5005	400g Aerosol	32002280
5004	4ltr	32002290
5009	20ltr	32002300

CRC Industrial 5.56

5000

- CRC Industrial 5.56 is non-flammable and fortified with PTFE for additional lubricating performance
- This multi-purpose spray frees rusted parts, displaces moisture and inhibits corrosion
- 400g aerosol



32002282

CRC 3.36

3005

- Thin invisible film that never dries or becomes brittle
- Penetrates into pores and cracks
- Does not have to be removed before welding, machining or being processed
- Easy to remove with CRC Lectra Clean or CRC Brakleen
- Extremely low surface tension
- Low surface tension and an affinity for metal
- 300g aerosol



32002170

Slipicone Release Spray

- Designed for use in the food industry for heavy duty release applications
- A heat-stable silicone anti-stick agent
- Resists breakdown and will not leave residues or gummy surfaces
- Operating temperature: -40–200°C
- Clear
- 300g aerosol



32424220

66 Marine

- 6006
- Penetrates and loosens scale, frees "frozen" parts, cleans, lubricates and displaces moisture
- CRC 66 Marine is a multi-purpose compound designed to end damage due to water and salt atmosphere in marine engines and boating equipment
- 300g aerosol



32002590

TAC2 Chain Lube

- 5035
- An exceptional lubricant, with a tough adhesive quality, which will bond to chain/wear surfaces to keep them in peak operating condition by reducing friction and wear than cause metal fatigue
- Resists cold, hot and salt water wash-off and high temperature sling-off
- Penetrates vital chain pin and bushing areas
- Heat resistant active over a wide temperature range -250°C to 165°C
- 300g aerosol



32002380

Power Lube with PTFE

- 3045
- High performance lubricant with PTFE
- Provides long lasting protection against friction and wear
- CRC Power Lube with PTFE is a lubricant that incorporates a sophisticated additive package including PTFE to provide long lasting protection against friction and wear displaces moisture and provides a long wearing protective film
- 350g aerosol



32002205

Extreme Duty Silicone Lube

- 3030
- Premium grade, high quality silicone lubricant that exhibits excellent temperature viscosity and lubrication characteristics
- This chemically modified silicone actually reacts with a metal to metal surface to provide metal to metal lubrication in which typical silicones fail
- 300g aerosol



32002200

CRC Long Life

- 3097
- CRC Long Life provides both superior lubrication and heavy duty corrosion protection for metal parts and assemblies that are stored indoors
- Withstands up to 566kg load in falex test method ASTM-D-3233 salt spray tests gave in excess of 400hr of protection
- Corrosion resistance up to 2 years
- 300g aerosol



32002250

CRC 2.26

- A stable, inert organic formula, especially prepared to prevent malfunction and deterioration due to the effect of moisture and corrosion, extends operational life reduces down time and maintenance
- Displaces water and moisture seals hard surfaces with a continuous molecular film and never becomes dry, hard or brittle
- Improves electrical properties



Product Code	Size	Part Number
2005	450g Aerosol	32002010
2006	4ltr	32002020



Keep all those dangerous products locked away with Flammable Liquid Storage Cabinets.

Find them in the Material Handling & Lifting section, page 104

Lubrication Sprays, Protection Sprays & Cleaners

Electrical Quality Silicone

2094

- High quality, multi-purpose silicone spray
- Non-corrosive formula that provides a thin, durable, clear, odourless film that lubricates, protects and eliminates squeaking and binding caused by friction
- Excellent mould release
- 300g aerosol

32002160



Lectra Clean

- CRC Lectra Clean effectively removes grease, oil, wax, dirt and other contaminants from motors, parts and other electrical mechanical equipment
- No flash point. No fire point. Quick drying
- Does not contain carbon tetra chloride, silicones, CFC 113, methyl chloroform, trichloroethylene or tetrachloroethylene

Product Code	Size	Part Number
2018	400g Aerosol	32002060
2020	4ltr	32002070



808 Silicone Spray

3055

- CRC 808 Silicone Spray is a concentrated formula that provides a thin, durable, odourless film that lubricates, waterproofs and protects all metal, plastic, rubber, fabric, wood, and painted surfaces
- 330g aerosol

32002210



NF Contact Cleaner

2017

- A revolutionary, technically proven, stable, no flash point, non-flammable, inert high purity cleaning solvent
- CRC NF Contact Cleaner is non-conductive, non-corrosive, non-staining, rapid-complete evaporation and contains no lubricants
- Does not contain CFC 113 of methyl chloroform
- 400g aerosol

32002050



Automotive Silicone

5074

- CRC Auto Silicone Lubricant is a non-corrosive formula that lubricates, protects and eliminates squeaking and binding caused by friction
- This silicone is clear, odourless and highly resistant to water
- 300g aerosol

32002500



CO Contact Cleaner

2016

- A unique, scientifically formulated plastic safe, technically proven, stable, inert high purity cleaning solvent
- CRC CO Contact Cleaner is non-corrosive, non-staining, rapid-complete evaporation and contains no lubricants
- Precision electronic cleaning solution
- Residue-free
- Fast evaporation
- Minimises downtime associated with "clean-in-place" cleaning methods
- Prevents harmful buildup and eliminates rinsing or wiping
- 350g aerosol

32002040



Lectra Shield

2031

- Long term indoor/outdoor corrosion inhibitor for machined surfaces and assemblies subjected to long periods of storage or adverse shipping conditions
- Displaces moisture and provides a transparent, amber waxy film for heavy protection of parts, equipment and machinery
- Lectra Shield will provide protection of equipment subject to heat, humidity, chemicals or corrosive atmospheres
- 300g aerosol

32002080



Automotive Electronic Cleaner

5013

- CRC Automotive Electronic Cleaner is a state of the art cleaner specially formulated for use on today's hi-tec electronic and computerised vehicles
- 350g aerosol

32002310



Urethane Seal Coat

- CRC Red and Clear Urethane Seal Coat are excellent adhering one-component polyurethane coatings
- Its abrasive resistant insulation acts as a protective film, for electrical and electronic applications
- CRC Urethane Seal Coats are stable single component polyurethane coating that dries fast, adheres well and forms a hard, durable, flexible and non-conductive film
- 300g aerosol



Product Code	Description	Part Number
2044	Red Urethane	32002120
2049	Clear Urethane	32002130

Aerostart

5051

- CRC Aerostart starts engines instantly, it is a unique and special formulation which combines a number of ingredients, each designed to play a vital part in starting engines
- Powerful anti-corrosive and anti-knock qualities and contains an upper cylinder lubricant
- 300g aerosol



32002420

Soft Seal

3013

- Long term indoor/outdoor corrosion inhibitor for machined surfaces and assemblies subjected to long periods of storage or adverse shipping conditions
- Displaces moisture and provides a transparent, amber waxy film for heavy protection of parts, equipment and machinery
- Soft Seal will provide protection of equipment subject to heat, humidity and salt spray
- Never becomes brittle and will not craze
- 300g aerosol



32002180

Battery Maintenance

5097

- Penetrates, loosens and neutralises all acid corrosion deposits
- CRC Battery Maintenance is an engineered product for the removal of acid corrosion deposits, electrolytes, dirt and moisture from battery terminals and surfaces
- Assures maximum battery current flow and promotes longer battery life
- 300g aerosol



32002530

Penetr8

5501

- High-speed penetrant that rapidly frees and dissolves rust and corrosion while quickly penetrating
- Disassembly of mechanical equipment, fittings and fixtures through its high speed penetration
- Clear formula that contains no dyes and leaves no mess
- The independent Capillary Penetration of Liquids test that was carried out on Penetr8 showed that it penetrates further than any of its competitors
- 400g aerosol



32002585

Battery Terminal Protector

5098

- Instant protection against battery terminal corrosion, is specially designed to protect battery terminals from corrosion which is a major cause of hard starting and battery failure
- Ideal for marine applications as it is highly resistant to salt water and salt spray
- Dries quickly to a soft film
- 300g aerosol



32002535

Belt Grip

3081

- Specially developed to meet the demand for a true industrial, automotive and food grade belt
- CRC Belt Grip is scientifically formulated with a synthetic polymer that is non-drying, water resistant and chemically stable
- Extends the life of drive belts by improving traction
- 400g aerosol



32002240

Find Post Battery Cleaning Products in the General Industrial Products section, page 263



Degreasers, Coolants, Gasket Stripper & De-Squeak

Aeroclean Degreaser

5070

- CRC Aeroclean Degreaser delivers a high impact concentrated jet of a unique formulation which combines blended surfactants, detergents and solvents designed to degrease and clean fast
- 400g aerosol

32002480



Hot Shot Degreaser

5073

- CRC Hot Shot Degreaser rinses off easily and leaves no residue
- A clean engine runs cooler and more efficiently
- Use on most metal surfaces including car and truck motors, chain saws, boats, lawn mowers and farm machinery
- 500g aerosol

32002490



Natural Degreaser

3076

- Naturally formulated, heavy duty, biodegradable cleaner/degreaser that is extremely effective for dissolving and removing grease, oils, lubricants, adhesives and contaminants without requiring water wash off and without leaving a residue
- CRC Natural Degreaser evaporates quickly and is non-corrosive, non-abrasive and non-staining
- 400g aerosol

32002235



Freeze Spray

2039

- CRC Freeze Spray is a multi-purpose dry coolant for maintenance, trouble shooting and repair
- Use Freeze Spray to isolate circuits or components while testing for heat-induced failures
- 300g aerosol

32002090



Brakleen

5089

- CRC Brakleen is formulated to quickly and safely remove brake fluid, grease, oil and other contaminant from brake linings, pads, drums and callipers
- Fast evaporation minimises downtime associated with "clean-in-place" cleaning methods
- 500g aerosol

32002520



Gasket Stripper

5021

- CRC Gasket Stripper is a formulation that is specially developed for the easy removal of tough bonded gaskets regardless of age or adhesive resistance
- Will instantly soften old gasket cement for quick removal, without damage to the metal components
- Safe on aluminium, steel and brass
- 300g aerosol

32002330



Brakleen FORCE

5085

- CRC Brakleen FORCE is non-chlorinated and does not contain any aromatic hydrocarbons, carbon tetrachloride, silicones or methyl chloroform
- Non-staining, non-corrosive and leaves no residue
- Cleans without disassembling the brake unit
- 400g aerosol

32002522



De-Squeak

5080

- CRC De-Squeak prevents brake noise before it occurs
- Metallic bonding formula fills grooves and imperfections in friction surfaces that commonly cause squeaks and squeals
- Use on new, freshly cut (turned) or existing brake rotors and drums
- Safe for use on all types of brake systems, including disc, drum and ABS
- Prevents rust and oxidation build up
- 300g aerosol

32002505



Clean-R-Carb

5081

- CRC Clean-R-Carb is a product engineered to maximise carburettor performance and control pollution
- It is an effective in-place cleaner that removes deposits, gum, varnish, lacquer, resin, paraffin, metallic salts, oil oxides, tar and gasoline stains
- Will not harm catalytic converters or oxygen sensors
- Ideal for use on all fuel system components and as a general parts cleaner
- 400g aerosol

32002510

**Bar's Leaks Stop Leak**

- Forms a lasting repair for both internal and external leaks in the head block and/or radiator
- Principal ingredient is a natural product
- Non-toxic
- Harmless to rubber, plastic and all metals



Product Code	Size	Part Number
BL150	150g	32004070
BL340	340g	32004080

Loctite Yuk-Off® Brake & Parts Cleaner

24441

- Yuk-Off® non-chlorinated Brake & Parts Cleaner instantly removes fluids, grease and dirt leaving no contaminant-attracting residue
- Evaporates quickly, non-staining
- Reduces maintenance costs
- 417g aerosol

32422070

**Anti-Freeze/Anti-Boil Coolant Concentrate**

- Provides protection to cooling systems of most vehicles for up to four years
- Suitable for both petrol and diesel engines
- Provides lubrication to water pumps
- Protects against freezing, electrolysis and alloy and cavitation corrosion



Size	Part Number
1ltr	32004010
2.5ltr	32004020
20ltr	32004030

So Easy One Step Tyre Care

5046

- CRC So Easy One Step Tyre Care penetrates the rubber tyre wall to remove grime and dries to a clear protective film
- No rinsing, no wiping, no rubbing
- Makes tyres look like new again
- 500ml trigger

32002400



Contact Us

Opening hours for all warehouses are:

Monday to Friday: 8am–5pm
Saturday: 8am–12 noon

Port Moresby

Phone: (+675) 325 1088

Lae

Phone: (+675) 472 3799

Kimbe

Phone: (+675) 983 5500

Madang

Phone: (+675) 422 1344

Kokopo

Phone: (+675) 982 9911

Mt. Hagen

Phone: (+675) 545 1990

Honiara

Phone: (+677) 30046



Clean up with
Hand Cleaners on
page 210 in the
Janitorial, Hygiene,
Crib & Leisure
Products section

Cutting Fluids & Compounds

Trefolex C.D.T Cutting Oil

3063

- Trefolex CDT Cutting Oil is a superior cutting, drilling and thread cutting lubricant for use on all types of metals
- Additives create a strong film that can withstand extreme pressure to increase tool life and improve cutting
- It is ideal for the critical machining of non-ferrous metals for all operations in Machinability Group 2
- 300g aerosol

32002217



Trefolex Cutting Compound

3060

- Trefolex is a green coloured, active cutting compound containing a colloid
- Melts slowly as frictional heat is generated
- Maintains efficient lubrication throughout operations such as pipe screwing, hack sawing, tapping, reaming, etc.
- It is suitable for all users of hand tools
- Trefolex prolongs the life of the tool
- It will not corrode steel nor affect aluminium
- 500ml

32002215



Trefolex HD Cutting Fluid

3065

- Trefolex HD Cutting Fluid is an extreme duty cutting fluid
- It is a thick fluid that sticks to the cutting tool throughout the operation
- Considered environmentally safe
- This fluid is ideal for tapping and drilling stainless steel, carbon steel, inconel, monel, hastelloy, titanium and aluminium and other alloys and exotics
- 500ml

32002218



RTD Metal Cutting Compound

- Metal cutting lubricant in paste form for machining operations on a range of metals
- Compound adheres to working surface and improves thread and surface finish
- Suitable for reaming, tapping, drilling and metal forming

ROCOL®



Product Code	Size	Part Number
RY551211	500g	32220010
RY551221	2.5kg	32220020

RTD Metal Cutting Liquid

- Medium viscosity high performance metal cutting lubricant for machining operations on a range of metals
- May be used neat or as an additive to boost the performance of conventional mineral cutting and forming oils
- Liquid can also be used as a die lubricant on severe drawing, punching and presswork operations
- Suitable for reaming, tapping, drilling, metal forming and broaching

ROCOL®



Product Code	Size	Part Number
RY550171	500ml	32220094
RY550181	5ltr	32220095
RY560151	20ltr	32220097

Ultracut Premium

- Flood applied, bio-stable, water-soluble oil containing extreme pressure additives formulated to provide premium cutting performance and excellent corrosion protection
- Suitable for severe duty machining operations such as milling, turning and boring over a wide range of ferrous and non-ferrous metals
- Ideal for use with manual lathes and other machine tools, NC controlled machine tools

ROCOL®



Product Code	Size	Part Number
RY562611	5ltr	32220090
RY562621	20ltr	32220092



Valve Grinding Compound

- Water-mixed silicon carbide abrasive
- Can be used in many grinding applications including hardened engine poppet valves



Grit	Size	Part Number	Grit	Size	Part Number
Fine	75g	32214020	Medium	500g	32214070
Fine	150g	32214030	Coarse	75g	32214080
Fine	500g	32214040	Coarse	150g	32214090
Medium	75g	32214050	Coarse	500g	32214100
Medium	150g	32214060	Fine & Coarse	50g	32214120

Lapping Compound

- Water-mixed aluminium oxide abrasive
- Holds the grit in suspension and provides lubrication
- 500g



Grit	Part Number
120	32218005
240	32218010
320	32218015
500	32218020
700	32218030

Anti-Spatter

- Cost effective, solvent-free and safe for aluminium and steel
- Non-flammable and non-corrosive
- Plating and painting safe and contains no silicone
- Protection for welding equipment, torches and nozzles, work pieces, tables, jigs, vices, pliers and other tools
- Classified as non-dangerous goods according to the ADG Code

simple
green



Product Code	Size	Part Number
SG13452	946ml	71895102
SG13454	3.78ltr	71895104
SG13457	18.9ltr	71895106

Loctite SF 7900 Ceramic Shield

1616692

- Unique dry film effectively protects welding equipment against metal spatter – up to eight hours, without the need for reapplication
- Increases productivity by up to 7%
- Reduces running costs for consumables by up to 40%
- Eliminates costs for cleaning equipment
- Ceramic, silicone-free protective coating
- Spray coating dries within seconds
- Easy to apply
- Excellent adhesion of coating
- Protects contact tips, welding nozzles and jigs
- Costs of the protective coating only a few cents per shift
- Prevents adhesion of welding spatter for up to eight hours with just one application
- 400ml

LOCTITE



32414118

Korode Kure Anti-Corrosive Compound

- Protects batteries, battery clamps, handles and iron work from corrosion
- Penetrates and dissolves existing corrosion
- 60ml tube



32412110



Take a look on page 326 in the Hand & Cutting Tools section for Cold Chisels

Mineral Turpentine

- Hydrocarbon solvent specifically designed for use in many paint formulations and associated thinners
- Mineral Turpentine is one of the most widely used hydrocarbon solvents as it combines good solvency with controlled evaporation
- Use for thinning paints, linseed oil, waxes and polishes, metal cleaning and clean-up of brushes and equipment after painting



Product Code	Size	Part Number
16010-1DIG	1ltr	66550210
16010-4DIG	4ltr	66550212
16010-20DIG	20ltr	66550214

Methylated Spirits

- Denatured alcohol, commonly used domestically and commercially as a cleaner and solvent for paints, lacquers and varnishes
- Suitable for table burners and methylated spirits stoves
- Cleaner for glass, mirrors, showers, tiles, fridges, ovens and other household appliances
- Thinning agent for paints, lacquers and varnishes
- Removes ink from non-porous surfaces
- Cleaning paint brushes
- Hard-surface cleaner and disinfectant



Product Code	Size	Part Number
15000-1DIG	1ltr	66550216
15000-4DIG	4ltr	66550218
15000-20DIG	20ltr	66550220

Thinners, Paint Strippers, Acetone, Expanding Foams & Wood Filler

All Purpose Thinners

- A general purpose paint thinner and cleaning solvent
- Suitable for thinning solvent based paint, acrylics and epoxies
- It improves paint consistency and reduces the risk of imperfections
- Fast drying and has a smooth gloss finish
- Recommended to wear suitable protective clothing and accessories while using this product



Product Code	Size	Part Number
1700-4DIG	4ltr	66550222
1700-20	20ltr	66550224

Paint Stripper

- A powerful methylene chloride based paint stripper that rapidly penetrates and lifts paint for easy removal
- Suitable for applications in automotive, industrial, marine and household areas
- Can be used on timber, metal and masonry surfaces
- The gel formula makes it suitable for vertical surfaces
- Has a coverage of approximately 0.75m² per litre
- Recommended to wear suitable protective clothing and accessories while using this product



Product Code	Size	Part Number
16885-60DIG	500ml	66550226
16885-61DIG	1ltr	66550228
16885-4DIG	4ltr	66550230

Acetone

- DIY cleaner and degreaser
- Use as a lacquer thinner or paint softener
- Ideal for cleaning fibreglass and PVC pipes
- 4ltr



66520090

For all your painting needs head to the General Industrial Products section, pages 235-238



SikaBoom AP

411946

- High yield, polyurethane expanding foam
- Excellent adhesion and insulation properties
- Rapidly and economically fills large voids and blocks out dust, noise, draft and vermin
- Cuttable, sandable and paintable, all in a multipositional, all directional can
- 750ml aerosol



32424336

FomoFill™ PU Foam

FMFLG750

- A versatile polyurethane polymer that reacts with moisture in the air causing it to expand to fill any shape hole or cavity. The cured foam can then be cut or shaped and painted as desired
- Great for thermal insulation, to block out drafts or to fill/repair big holes prior to painting
- Application temperature: 5–25°C
- 750ml



32424520

BlazeBrake™ Fire Rated Foam

FRF700

- A one component expanding PU foam suitable for sealing construction joints and service penetrations
- Prevents the penetration and transfer of flames, smoke and gases between building compartments
- Reacts with moisture in the air causing it to expand to fill any shape hole or cavity. The cured foam can then be cut or shaped and painted as desired
- Density: 20–28kg/m³
- Temperature resistance: Long term: -40–90°C
Short term: -40–130°C
- Pale yellow
- 750ml



32424522

Maple Plastic Wood Filler

- Solvent-based wood filling cement
- Suitable for all interior woodwork applications
- Fast setting
- Can be treated in the same way as real wood when dry
- Maple timber coloured
- 230g tin



32414240

Interior Powder Filler

- Cellulose reinforced powder filler that reacts with water to form a solid filler ideal for patching interior plasterboard, fibro, masonry, timber and brick
- White powder form until mixed with water
- Fills cracks and holes in a single application
- Product has excellent adhesion
- Remains workable for 1 hour
- Can be nailed or screwed when dry
- Paintable with oil and water based paints
- Is water based, so can be cleaned up with water
- Dries white



Size	Part Number
500g	32428010
1.25kg	32428015

RTV 926 Silicone Adhesive Sealant

- A single component, neutral cure sealant
- Cures quickly to a consistent silicone rubber that remains flexible and durable
- Has a high level of adhesion to most surfaces and can withstand a large range of chemicals and temperatures, making it ideal for industrial applications
- Translucent
- 300g



32424030

Gap Filler

- Acrylic caulk
- Water-based formula
- Suitable for interior and exterior applications
- Can be painted over once fully set with oil-based or other types of paints
- White
- 450g



32424230

Sikaflex-PRO

- Multi-purpose polyurethane sealant
- Available in 10 colours
- Available in cartridges and sausages



Product Code	Description	Size	Part Number
134219	White	310ml Cartridge	32424307
134221	Black	310ml Cartridge	32424306
90387	Construction	600ml Sausage	32424330

Gap Filler

- Multi-purpose gap filler
- Suitable for indoors and outdoors
- Water-based formula allows for easy clean up
- High flexibility and a longer lasting result
- White
- 475g



32424235

Plumbing Roof & Gutter Silicone

- Neutral cure
- Single component RTV silicone
- Suitable for all types of roofing, guttering and weatherproofing jobs
- Can be used on various metals, ceramics, concretes, painted surfaces and rain water tanks
- Transparent
- 300g



32424240

Multi-Purpose Clear Sealant

- Non-corrosive, neutral cure multi-purpose sealant
- Perfect for water leakage and seepage problems
- Easy to use and suitable for jobs around the home
- Dries clear and remains smooth and flexible to blend with any surface and location
- Water and mould resistant
- 270g cartridge



32424225

Sikasil AP

- Multi-purpose roof and gutter silicone sealant, will adhere to polycarbonates
- 300ml cartridge



Product Code	Colour	Part Number
407717	Black	32424331
405154	Clear	32424332
407719	Grey	32424333
405663	White	32424334

Silicones & Sealants

Silastic 732 RTV

- Premium multi-purpose sealant
- Single component silicone sealant with no mixing required
- FDA approved
- Waterproof and resistant to a wide range of temperatures



Colour	Size	Part Number
Clear	139ml Tube	32424010
Clear	310g Cartridge	32424020
White	139ml Tube	32424040
White	310g Cartridge	32424050
Black	139ml Tube	32424060
Black	310g Cartridge	32424070

Silastic 734 RTV Sealant

- Flowable, self-levelling sealant
- Ideal for filling voids, cracks and crevices
- Can be used as a conformal coating for connections or battery terminals
- Suitable for coating mechanical devices and making formed-in-place gaskets
- Temperature range: -65–177°C
- 300ml cartridge



Colour	Part Number
Clear	32424090
White	32424100

Silastic 736 RTV Sealant

- Heat resistant sealant
- Used for sealing and bonding applications at high temperatures
- Suitable for work on heaters, ovens, smoke stacks, gas appliances and duct work
- Temperature range: -65–315°C
- Red/white
- 90ml/85g



32424110

Silastic 738 RTV Sealant

- Electrical sealant
- Ideal for bonding and sealing corrosion-sensitive electrical and electronic equipment
- Temperature range: -62–180°C
- White
- 90ml/85g



32424130

Maniseal Exhaust Cement

5061

- CRC Maniseal Exhaust Cement seals off all noxious fumes and contains no asbestos
- Expands and sets when heated ensuring a perfect seal against carbon monoxide
- Also ideal for industrial use where a seal is required that will stand intense heat up to 300°C
- 142g tube



32002430

Silastic Auto Sealant

- 100% silicone rubber sealant
- Designed to stop leaks, seal against water and dust and insulate electrics
- Can also be used for noise and vibration dampening
- Bonds to paint, fibreglass, metal, canvas and most plastics
- Operating temperature: -50–230°C
- 75g tube



32424150

Rhodorseal RTV 5661 Silicone

- Automotive high performance gasket
- A single component, thixotropic silicone elastomer
- Sets at room temperature
- Oil resistant
- Off-white
- 310ml



32424120

Silastic Gasket Sealant

- Stops leaks and acts as a seal against water and dust
- Can be used to insulate electrics and for vibration and noise dampening
- Neutral cure
- Will bond to a wide range of surfaces without tarnishing
- Operating range -50–230°C
- 75g tube



32424170

Silastic Marine Sealant

- 100% silicone rubber, neutral cure
- Salt water resistant
- Bonds, weatherproofs and prevents water damage
- Permanently flexible
- Translucent
- 75g tube



32424190

Sikaflex-255 Extra

- 92010
- Windscreen adhesive
- Paintable and non-corrosive
- 310ml cartridge
- Black



32424310

Sikaflex 292i

- 409802
- Assembly adhesive ideally suited to marine environments, with high resistance to fresh and sea water
- Elastic with good gap filling properties and can be overpainted
- Bonds well to a variety of substrates
- 310ml cartridge
- White



32424320

Sikaflex-11FC

- Multi-purpose sealant/adhesive
- Approved for use in potable water
- 310ml cartridge



Product Code	Colour	Part Number
134182	White	32424300
134183	Black	32424302

Sikaflex Tank

- 156879
- Polyurethane joint sealant, ideally suited to contaminated water and high chemical environments
- Suitable for use in facilities for storage, filling and handling of contaminated water and other liquids
- For sealing joints in water retaining structures including sewage, water treatment, filtration and aerating tanks
- 600ml sausage
- Grey



32424335

Liquid Nails Construction Adhesive

- General purpose construction adhesive
- Has a high strength bond to most building materials and is polystyrene safe
- Gun style application makes it easy to use
- Suitable for both interior and exterior applications
- Ideal for most industrial and household materials such as steel, sheet metal, timber, plasterboard, ceramics and more
- Beige
- 320g



32414230

Silastic Windscreen Sealant

- 100% silicone rubber, neutral cure
- Creates a permanent seal
- Suitable for windscreens, tail lights, canopies and sunroofs
- Weatherproof and will not crack or perish
- Seals out dirt and dust
- Black
- 75g tube



32424210

Anchorfix 1

- 82145
- Multi-purpose, polyester based anchoring and bold adhesive
- Suitable for use with threaded rod, starter bar, hinges and bolts in brick, stone, concrete etc.
- Standard cartridge gun application, may be used in hollow blocks with the use of Sika Anchorfix sleeves
- 300ml cartridge



32424337

Caulking Guns, Wood Glues & Adhesives

Caulking Gun

- Suitable for use at home or in the workplace
- Skeleton style
- Features finger guard for comfort
- Big ladder hook
- Suits 310ml cartridges
- Pistol rod diameter: 7.8mm



62520020

Tradesman Caulking Gun

- Suitable for professional applications
- Aluminium trigger
- Suits 310ml cartridges



62520080

ChemSet™ Applicator

CUAP

- Dispenses all of the products in the ChemSet™ injection range
- Suitable for 380ml and 750ml cartridges
- Tough, durable metal construction
- Twin drive for extra power
- Also available: 300ml caulking gun for Ultrafix™ Plus and all 300ml construction adhesive and sealant cartridges



43691010



Selleys 308 High Stress Wood Glue Kit

- Two part, high strength adhesive consisting of a white powder resin and a colourless hardener
- Suitable for wood, timber, plastics and hardboard in most interior and exterior applications
- Water, mould and heat resistant
- Cures at room temperature and sets to a rigid solid
- Sets to a pale fawn colour
- 150g kit



86410900

Contact Adhesive

- Solvent-based polychloroprene contact adhesive
- Ideal for bonding veneers of timber and laminated plastics
- Instantly bonds on contact and is suitable to use in situations where clamping or pressing are difficult or not available
- Can be used on cork, felt, leather, rubber, canvas and metals
- Heat resistant up to 130°C
- Clear
- 4ltr



86410630

Loctite 401 Instant Adhesive

40124-25

401 is a low viscosity, fast curing, cyanoacrylate adhesive. This product is less dependant on surface moisture for cure speed than other standard CA grades. Can be used with PP primer 770 for polyolefin bonding.

- Suitable for rapid bonding of metal, plastic, rubber, cork, wood, paper, leather, fabric etc.
- Unique chemistry ensures rapid cure even on difficult to bond substrates (may require priming)
- 25ml



32414040

LOCTITE

Selleys Aquadhere PVA Wood Glue

- PVA adhesive specially formulated for interior woodworking repairs and projects
- No mixing required – ready to use straight from the pack
- Suitable for end grain gluing – won't stain timber
- White in colour, but dries clear
- Non-toxic
- Cleans up with water



Size	Part Number
500ml	32414280
1ltr	32414290

Loctite 406 Instant Adhesive

40633-25

High strength cyanoacrylate adhesive for bonding difficult materials. Rapid bonding of wood, leather, metal, plastic, rubber, cork, fabric, paper and ceramics.

- Fixes very fast, even on difficult to bond substrates (may require priming)
- Low viscosity
- Fast fix time of 2–30 seconds
- 25ml



32414110

LOCTITE

Loctite 454 Instant Adhesive Gel

A045416

Cyanoacrylate adhesive with gel consistency for bonding difficult and porous substrates even on vertical surfaces. Superior gap filling ability up to 0.25mm (0.010").

- Suitable for rapid bonding of metal, plastic, rubber, cork, wood, paper, leather, fabric etc.
- No run, no drip
- Fast fix time of 2–60 seconds
- 20g

LOCTITE



32414090

PVC Pipe Solvent Cement

- PVC solvent is suitable for use in pressure applications, including potable water



Size	Part Number
500ml	32414255
1ltr	32414260

PTFE Thread Sealing Tapes

- Temperature range: -268°C–260°C

Pink

- Suitable for plumbers and pipe fitters – all threaded connections involving air, water, sewage and chemical
- Maximum pressure rating: 10,000psi (68.95MPa)

Gold

- Clean, easily applied, non-toxic
- Highly inert, chemically resistant to almost all known chemicals, gaseous or liquid

Eureka

- Clean, easily applied, economical, non-toxic, hypoallergenic



Product Code	Description	Size	Thickness	Part Number
T4HG005	Gold	12mm x 13.7m	0.1mm	32426030
T4HG008	Gold	19mm x 13.7m	0.1mm	32426040
T4HG011	Gold	25mm x 13.7m	0.1mm	32426060
T4HP2022	Pink	12mm x 13.5m	0.1mm	32426035
T3EU021	Eureka	25mm x 12m	0.076mm	32426050

Find a range of other tapes in the General Industrial Products section, pages 230–231



Thread Sealants

- Loctite Anaerobic Thread Sealants prevent leakage of fluids and gases from threaded joints
- They offer the ability to seal fittings in any position and can achieve an instant moderate pressure seal

LOCTITE



Product Code	Description	Colour	Max. Thread Diameter	Temperature Range	Size	Part Number
56747A	Loctite 567 Pipe Sealant – Controlled Strength – High Temp – Ideal for coarse metal threads where slow cure allows adjustment of fittings. Gas approved (AGA Certificate 3207, 1,050kPa)	White	75mm	-54 to 205°C	50ml	32412250
56741					250ml	32412260
19259	Loctite 577 High Pressure Pipe Sealant – Medium Strength – Fast Cure – Ideal for coarse metal threads where high locking strength is required. Approved for potable water (AS/NZS 4020) & gas (AGA Certificate 4787 to 2,600kPa)	Yellow	75mm	-54 to 150°C	50ml	32412245
34112					250ml	32412248
56950	Loctite 569 Hydraulic Sealant – Low Strength – Fast Cure – Recommended for fine threaded fittings as used in hydraulic & pneumatic applications	Brown	17mm	-54 to 150°C	50ml	32420220
56970					250ml	32420230

Threadlockers, Retaining Compounds & Primers

Threadlockers

- Loctite Anaerobic Threadlockers prevent loosening due to vibration
- Prevents seal threads against leakage and corrosion
- Provide controlled lubrication for correct torque – tension relationship (clamp load)


LOCTITE

Product Code	Description	Strength	Colour	Temperature Range	Size	Part Number
22220	Loctite 222 Screw Lock Threadlocker – Best strength for screws & small fasteners. Will undo with normal tools. Also use on low strength metals such as aluminium which can break during disassembly	Low	Pink	-55 to 150°C	10ml	32420020
22250					50ml	32420030
45083					250ml	32420040
44089	Loctite Best Ever 243 Threadlocker – Best strength for nuts & bolts, undo with hand tools. Improved oil tolerance, cure on passive metals & heat ageing. Eliminates backlash in keyways	Medium	Blue	-55 to 180°C	10ml	32420080
44092					50ml	32420090
44094					250ml	32420100
44279	Loctite Best Ever 263 High Strength Threadlocker – Best strength for large fasteners & studs. Improved oil tolerance, cure on passive metals & heat ageing. May require heat to remove	High	Red	-55 to 180°C	10ml	32420110
44130					50ml	32420140
44131					250ml	32420150
27750	Loctite 277 Threadlocker – Very high strength & chemical resistance. Very high viscosity for threads to 50mm in severe operating conditions. Outstanding chemical resistance. Heat may be required for disassembly	High	Red	-55 to 150°C	50ml	32420160
29020A	Loctite 290 Wick In Medium Strength – Very low viscosity grade for post assembly applications, e.g. adjustment screws. Wicks in by capillary action. Fast cure, excellent chemical resistance. Also seals porosity	Med-High	Green	-55 to 150°C	10ml	32420170
45076					50ml	32420180

Retaining Compounds

- Loctite Anaerobic Retaining Compounds can be used to augment or replace traditional interference fits for cylindrical components
- They increase assembly strength
- Prevent fretting corrosion and backlash
- Reduce assembly cost
- Can be used to reclaim worn parts


LOCTITE

Product Code	Description	Colour	Max. Gap Fill	Temperature Range	Size	Part Number
30013	Loctite 609 Retaining Compound – Medium/high strength for metal pulleys, sprockets, sleeves, couplings, bearings, etc. Dismantles with press or pullers	Green	0.2mm	-54 to 150°C	10ml	32420240
30015					50ml	32420250
30014					250ml	32420252
62050	Loctite 620 Retaining Compound – High Strength – High temp (230°C)	Green	0.25mm	-54 to 230°C	50ml	32420260
63531	Loctite 635 Retaining Compound – Very High Strength – Slow cure. Ideal where time is required for assembly	Green	0.2mm	-54 to 150°C	50ml	32420270
21314	Loctite 641 Bearing Mount – Medium Strength – Ideal for parts that require disassembly. Can be used in slip, press or shrink fits to prevent unwanted movement & fretting corrosion. Applications: mounting bearings, bushes, sleeves, seals, valve guides, woodruff keys & liner assemblies	Yellow	0.2mm	-54 to 150°C	10ml	32420050
45079					50ml	32420060
45081					250ml	32420070
66010A	Loctite 660 Quickmetal® – High Strength Press Fit Repair – Gap filling paste. Repairs worn shafts or housings, keyways, splines & creates form in place shims	Silver	0.5mm	-54 to 150°C	6ml	32422010
66040					50ml	32422020
1800574	Loctite 680 Retaining Compound – Very High Strength – Fast cure for slip fit assemblies. High load transmitting grade for permanent assemblies, e.g. earth moving, mining equipment	Green	0.2mm	-54 to 180°C	50ml	32420280
1800573					250ml	32420290

Loctite 7649 Primer

- 22410A Primer for Loctite anaerobic adhesives and sealants
- Assures fast fixing of parts, generally within 15–30min (refer to product technical data sheet)
- Use where accelerated cure speed is required in cold weather or on inactive metals
- Note: not a cleaner/degreaser
- 100ml

LOCTITE


32420320

Loctite 770 PP Primer

- 29520A 770 Polyolefin Primer is a single component material which dries rapidly at room temperature
- It enables polyolefin and other low energy surfaces suitable for bonding with Loctite cyanoacrylate adhesives
- 100ml

LOCTITE


32420315

Loctite 7471 Primer

22477

Primer designed to speed the cure of Loctite anaerobic adhesives and sealants.

- Primer for Loctite anaerobic adhesive and sealants
- Use where gaps slightly exceed normal recommendations
- Use when accelerated cure speed is required in cold weather or on inactive metals
- Note: not a cleaner/degreaser
- 133ml

LOCTITE



32420310

Plastic Welder

DS-220

- Toughened structural adhesive formulated for bonding dissimilar substrates
- Highly resistant to hydrocarbon fuels including gasoline, jet fuel, motor oil and hydraulic oil
- Resistant to weathering, humidity and wide temperature variations
- Suitable for bonding PVC, fibreglass, ABS, steel, acrylics, polycarbonate, polyesters (PET; PBT), wood and ceramics
- 28.4g

Devcon



32414335

Find Sanding Discs in the Welding & Abrasives section, page 420



Plastic Steel Epoxy

DS-5

- Steel-filled epoxy for repair of steel machinery and appliances
- Works on all metals and fills cracks and chips
- High strength bond (17MPa, 2,500psi)
- Chemical resistant and waterproof
- Suitable for drilling, tapping, machining, sanding and painting
- 56.8g pack

Devcon



32414305

2K Tech®

AB2T4

- Premium grade 2K body filler
- Creamy texture, minimal pin-holing
- Effortless blading
- Easy sanding
- Compatible with all automotive paint systems
- 4kg

SEPTONE



32422820

Loctite 3801 Five Minute Epoxy Adhesive

20981

A fast setting, two component industrial grade epoxy adhesive. High strength and general purpose. Once mixed, the epoxy cures at room temperature and forms a clear bondline. When fully cured, the epoxy is resistant to a wide range of chemicals and solvents, and acts as an excellent electrical insulator.

- Suitable for general purpose bonding of wood, metals, ceramic, concrete, marble, glass, china, fibreglass and laminates
- 25ml

LOCTITE



32414020

Fibreglass Repair Kit

ABFR

- Complete kit to repair large holes, cracks etc.
- Contains Matting, Polyester Resin and Catalyst (MEKP)
- Water resistant
- Recommended for metal, fibreglass, timber and masonry

SEPTONE



32428225

Plastic Steel Putty (A)

- Steel filled epoxy for maintenance, repairs, tooling and production applications
- Can be machined, drilled, tapped and painted
- Hardens in about 4hrs, will not shrink, excellent heat transfer and bonds to a variety of substrates
- Suitable for repairing pipes, valves and tanks, rebuilding worn equipment, tooling and holding fixtures

Devcon



Product Code	Size	Part Number
D10110	500g	32414345
D10120	1.5kg	32422380

Repair Products

Plastic Steel 5-Minute Putty (SF)

- Super fast curing steel filled epoxy that retains all the properties of Plastic Steel Putty (A)
- Pot life of 5 minutes at 24°C makes it perfect for emergency repairs to metal components required back in service after one hour
- Maximum operating temperature of 93°C, ideal for low temperature applications
- Suitable for repairing pipes, tanks and other essential equipment



Product Code	Size	Part Number
D10250	250g	32422300
D10240	500g	32422310

Loctite – Fixmaster® Metal Magic Steel Stick 98853

An easy to use, steel-filled compound designed for emergency maintenance repairs on dry or damp surfaces. Available in a conveniently packaged putty stick, the resin and hardener are pre-measured for consistent strength and easy application – simply twist off desired amount, knead and apply. Cures to a metal-like finish in less than 10 minutes under typical dry service temperatures of -30 to 121°C.

- Suitable for sealing chemical tanks, smoothing welds, stopping pipe and tank leaks, filling oversized bolt holes, repairing holes in elbows cracks in castings and holes in gas and fuel tanks
- 113g



32422030

Titanium Putty

D10760

- Ideal for high performance applications with superior compressive strength
- Good chemical and corrosion resistance and is wear resistant
- Wide temperature operating range up to 175°C
- Suitable for rebuilding shafts, keyways and bearing housings and filling under powdercoating
- 450g



32422440

Flexane® 80 Putty

D15820

- Trowelable urethane that cures to Shore A 87 hardness
- 100% solid, tear resistant and retains its shape under pressure (like rubber)
- Protects against impact, abrasion, vibration, expansion and contraction
- Suitable for process machinery, flexible seals in concrete tanks, pipes and chutes and rubber repair of rollers and conveyor belts
- 450g kit



32422270

Wear Guard High Impact

- High density, micro alumina ceramic bead filled and flexible epoxy for superior impact abrasion
- High compression and impact strength. Ideal where impact and flex occur
- Creamy, non-sag paste for applications from vertical to overhead
- Suitable for pumps, screens, chutes, handling equipment and screw conveyors



Product Code	Size	Part Number
D11464	4kg	32222220
D11460	10kg	32222230

Combowear FC (Fast Cure)

D11450

- Non-sag, epoxy wearing compound that combines the abrasion resistance of high alumina ceramic beads with silicon carbide
- Fast cure properties can have the repair back in service within 60 – 90 minutes at 24°C
- Ideal for adhesion to metal, ceramic and concrete substrates and bonds to damp surfaces
- Suitable for protecting pipe elbows, housings, exhaust fans, repairing coal fuel lines, bins and hoppers
- 4kg kit



32222240

Brushable Ceramic Kits

- Low viscosity, brushable, high performance ceramic-filled epoxy
- Provides a smooth, protective barrier against wear, abrasion, corrosion, erosion and attack by most chemicals
- Suitable for protecting pump casings and flange faces, rebuild and seal heat exchanger tube sheets, impeller blades, valves, water boxes, fan blades, chutes and hoppers
- 1kg kit



Product Code	Colour	Part Number
D11765	Blue	32220017
D11760	Red	32220015

Need a Bolstered Gasket Scraper?
Find it on page 325 in the
Hand & Cutting Tools section



Crack Test CTW 6

- Fast dry
- Provides a great contrast to magnetic inks and dry powders
- Suitable for marking out or gauging indications
- Can be used as a stencil paint
- Designed for industrial applications only
- White
- 300g aerosol



32224000

Crack Test CTB 3

- Magnetic ink
- Used to detect defects in the surface and sub-surface area in ferro-magnetic materials
- Designed for industrial use only
- Black
- 300g aerosol



32224010

Crack Test CTC 1

- High performance cleaner
- Used for cleaning before and after the use of background paint
- Produces a clean, dry and oil-free surface
- Designed for industrial use only
- 350g aerosol



32224020

Flawfinder Crack Detection Kit

RY642543

- Three part method of crack detection for welded joints and engineering components during maintenance or manufacturing
- No destructive testing
- Ideal for cast and welded metal components, glass and ceramic components and under normal light conditions



32224050

Rapp-it Pipe Repair Bandage



- Rapp-it is a roll of fibreglass bandage impregnated with water-activated polyurethane resin, that provides an easy and fast way to repair pipes in a wide range of situations
 - A pipe leak can happen anywhere, any time and without warning, and can threaten to shut down your entire operation, resulting in costly downtime and production loss
 - No mixing or measuring required
 - Results in a strong, superior pipe repair in only 30 minutes
 - Can withstand internal pressures up to 2,500kPa (360psi) and temperatures up to 150°C
 - Each pack includes a bandage, stick of epoxy putty and a pair of gloves
- Suitable for a wide range of industries, including the mining, industrial, oil and gas, processing and marine industries. Rapp-it can assist your organisation with any of the following pipes:
- PVC pipe repair
 - Water pipe repair
 - Copper pipe repair
 - Steel pipe repair
 - Iron pipe repair
 - Galvanised pipe repair
 - Most other emergency pipe repair or leaking pipe situations



Product Code	Size	Part Number
RAP122	50mm x 3,600mm	32428120
RAP123	75mm x 3,600mm	32428130
RAP124	100mm x 3,600mm	32428140
RAP164	100mm x 4,800mm	32428160
RAP304	100mm x 9,000mm	32428170

Denso Petrolatum Tape



- Denso Petrolatum Tape is a non-woven synthetic fabric carrier free of chemical impurities, fully impregnated and coated with a neutral petroleum based compound with inert siliceous filler and inhibitors
- Used for corrosion protection, sealing and water proofing of metal above and below ground
- Protection of pipelines, joints, fittings, cables and tensioning members



Product Code	Size	Part Number
P600050	50mm x 10m	66542105
P600100	100mm x 10m	66542100
P600150	150mm x 10m	66542110

Denso SA PVC Overwrap Tape



- Denso SA PVC Overwrap Tape is a tough conformable, pressure sensitive tape
- Plasticised PVC, incorporating natural and synthetic rubber adhesive and fungal inhibitor
- Used as an outerwrap over Petrolatum Tape for buried and immersed applications



Product Code	Size	Part Number
P931050	50mm x 30m	66542145
P931100	100mm x 30m	66542148
P931150	150mm x 30m	66542150

Piling Tape, Wrap Tape, Tack Tape & Primers

Denso Marine Piling Tape

S970150

- Denso Marine Piling Tape is a self-priming tape coated with petrolatum based compounds developed for the protection of surfaces on marine structures
- Non-woven synthetic fabric carrier fully impregnated and coated with neutral petrolatum based compounds
- High density polythene film backing
- Includes inert siliceous mineral fillers, water displacing and biocidal agents
- Stable in composition and plasticity over a wide temperature range
- Non-hardening and non-cracking
- Accommodates vibration and movement of substrate
- Highly resistant to mineral acids, alkalis and salts
- Will adhere and remain attached to clean, sound, wet or dry metal surfaces above or below water
- When applied spirally with sufficient tension, it will displace moisture and develop a water resistant bond to the primed surface
- Formulated to provide protection against sulphate reducing bacteria
- Can be applied under water
- 10m x 150mm



66542115

Denso S43 Rust Prevention Innerwrap Tape

- Denso S43 tape is part of the Denso Butyl Tape System, designed for the protection of line pipe, joints, welds, bends and fittings
- Denso S43 is a self-amalgamating butyl rubber based compound encasing a polyethylene reinforcing film
- Stable over a wide temperature range and is non-hardening and non-cracking
- Accommodates vibration and movement of substrate
- Highly resistant to mineral acids, alkalis and salts
- Compatible with factory applied pipeline coatings such as Fusion Bonded Epoxies (FBE), Polyethylene (PE) and Polypropylene (PP)
- Repairs to damaged areas in factory coated pipes
- Provides the anti-corrosion protection to the substrate



Product Code	Size	Part Number
H145050	15m x 50mm	66542120
H145100	15m x 100mm	66542160
H145150	15m x 150mm	66542165

Denso R23 Rust Prevention Outerwrap Tape

- Denso R23 tape is part of the Denso Butyl Tape System, designed for the protection of line pipe, joints, welds, bends and fittings
- Denso R23 is a self-amalgamating butyl rubber based compound with a polyethylene backing
- Stable over a wide temperature range and is non-hardening and non-cracking
- Accommodates vibration and movement of substrate
- Highly resistant to mineral acids, alkalis and salts
- Repairs to damaged pipe areas in factory coatings such as Fusion Bonded Epoxies (FBE), Polyethylene (PE) and Polypropylene (PP)
- Provides the mechanical protection to the system



Product Code	Size	Part Number
H146050	30m x 50mm	66542170
H146100	30m x 100mm	66542180
H146150	30m x 150mm	66542190

Denso Hi Tack Tape

- A specially formulated, high tack, cold applied petrolatum tape for high performance corrosion protection of above ground pipe work, fittings and structural steelwork where only limited surface preparation is possible and long term performance is necessary
- Non-woven synthetic fabric carrier fully impregnated and coated with neutral petrolatum based compounds, inert siliceous fillers, adhesion promoted butyl rubber based resins and dissolved in solvent based vehicles
- Stable over a wide temperature range and is non-hardening and non-cracking
- Accommodates vibration and movement of substrate
- Highly resistant to mineral acids, alkalis and salts
- Will adhere to structural steelwork, pipes and fittings



Product Code	Size	Part Number
P612100	10m x 100mm	66542210
P612150	10m x 150mm	66542215

Find Flanges in the Hydraulics, Valves, Hoses & Fittings section, page 461



Denso Butyl Primer

H104004

- Denso Butyl Primer is part of the Denso Butyl Tape System, designed for the protection of line pipe, joints, welds, bends and fittings
- Denso Butyl Primer is a brush, sponge roller or spray applied solvent based adhesive primer designed to promote the adhesion of butyl tapes to steel pipelines for anti-corrosion and mechanical protection
- For use on new, power brushed or grit blasted metal pipe work, to condition the surface prior to the application of Denso self-amalgamating tapes
- For the prevention of corrosion on metallic pipelines
- Stable over a wide temperature range and is non-hardening and non-cracking
- Accommodates vibration and movement of substrate
- Highly resistant to mineral acids, alkalis and salts
- Will adhere and remain attached to steel and butyl rubber based tapes
- 4ltr



66542205

Denso MP Primer

- Denso MP Primer is an integral component of the Denso Petrolatum System
- Displaces surface moisture, passivates surface oxides, fills surface imperfections and ensures intimate contact between Denso Petrolatum Tapes and the substrate



Product Code	Size	Part Number
P300001	1kg Tin	66542010
P300004	4kg Tin	66542015
P300020	20kg Drum	66542020

Denso Hi Tack Primer

P312004

- A brush applied, solvent based, adhesive promoted primer
- For use on new, power brushed or abrasive blasted steel work to condition the surface prior to the application of the Denso petrolatum tape systems
- The primer is designed to promote the adhesion of petrolatum tapes which provide corrosion protection to steel
- It is a component of the Denso Steelcoat 100 System
- Protection of flat steel or steel on flat areas where tapes are applied in a longitudinal fashion
- Protection for structural steel, pipes, welded joints, bends, fittings from corrosion, above or below ground
- To protect steel from corrosion the system completely encases and segregates the steel surface from the surrounding environment by making intimate contact with the entire exposed substrate
- 4ltr



66542200

Fibreglass Lagging Tapes

- Produced from closely woven or knitted yarns, producing tapes which retain a high degree of softness and flexibility
- Applications include thermal and electrical insulation; gasketing, pipe, hose and valve wrapping; furnace and boiler door seals
- Max. operating temperature: 550°C
- 30m roll



Product Code	Size	Part Number
083003	25mm x 1.5mm	67050020
083006	25mm x 3.0mm	67050030
083004	50mm x 1.5mm	67050040

Denso Rockmesh

M921000

- Denso Rockmesh is an expanded high density polyethylene mesh designed to give extra mechanical protection to pipe coatings laid in rough/rocky ground or abrasive backfill
- Its diagonal mesh construction gives great flexibility for easy application whilst ensuring maximum protection to the pipe coating
- Easy to use
- Mechanically protects pipe coating
- No risk of screening cathodic protection
- 1.3 x 20m



66542240

Fibreglass Lagging Rope

083708

- Consists of a low density blown glass fibre core enclosed in a braided cover of glass yarn
- Provides an efficient method of insulating pipe work and is also suitable for a variety of high temperature sealing and caulking applications
- Max. operating temperature: 550°C
- 25mm x 30m



67050520

Denso Super-Light Profiling Mastic

P400100

- Denso Super-Light Profiling Mastic is a cold applied, self-supporting mastic composed of saturated petroleum hydrocarbons, beads of closed cell cellular polymer and flow control additives
- The mastic is used to provide a smooth profile on irregular shaped fittings such as flanges and valves
- It is applied to cleaned, primed surfaces (Denso MP Primer) prior to over wrapping with Denso Petrolatum or Bituminous Tapes
- 10kg



66542050

Rubber Insertion

- General purpose synthetic rubber sheet made from Natural Rubber polymer
- Smooth finish on both sides
- Hardness: 65 +/-5
- Density: 1.50 +/-0.05g/cm³
- Tensile strength: 35kg/cm²
- Elongation at break: 200%
- Tear resistance: 12kg/cm
- Temperature range: -20°C–80°C
- Width: 1.2m
- 10m roll



Description	Thickness	Part Number	Description	Thickness	Part Number
1 Ply	1.5mm	67080015	2 Ply	6mm	67080060
1 Ply	3mm	67080030	2 Ply	9mm	67080090
2 Ply	4.5mm	67080045	—	—	—

Denso Elastomeric Membrane Topcoat Kit

M31001.3

- Denso Elastomeric Membrane BG is a 100% solid, two-component urethane elastomer system that can be applied as a coating offering good mechanical properties, good chemical and UV resistance
- Room temperature processing and curing
- Good inter-laminar adhesion
- Good adhesion to well-prepared surfaces
- Excellent resistance to aqueous environments
- Good chemical and abrasion resistance
- 1.3ltr kit



66542230

Rubber Insertion

- General purpose synthetic rubber sheet made from Natural Rubber polymer
- Displays good physical properties including tear strength, recovery properties and abrasion resistance
- Poor resistance to ozone, oxygen and sunlight
- Suitable for gaskets where no particular high resistance to heat, oils or solvents is required eg. cold water, sewage pipes etc
- Temperature range: -50–120°C



Product Code	Size	Part Number
1211208	0.8 x 300 x 1,000mm	67080000
1211215	1.5 x 300 x 1,000mm	67080005
1211230	3.0 x 300 x 1,000mm	67080010

Gasket Material

Klingerstatite AS80.090

- Oil/fuel resistant gasket paper
- Gearbox, carburettors, water pumps
- Temperature range: 0°C–120°C
- Sold per metre (except Rollettes)



Product Code	Size	Part Number
114001	0.15mm x 0.9m	67020015
114044	0.25mm x 0.9m	67020025
114045	0.4mm x 0.9m	67020040
114046	0.8mm x 0.9m	67020080
114047	1.5mm x 0.9m	67020150
114027	2.4mm x 0.9m	67020240
114049	3.2mm x 0.9m	67020320
114104	0.4mm x 1m x 300mm Rollette	67020404
114108	0.8mm x 1m x 300mm Rollette	67020408
114115	1.5mm x 1m x 300mm Rollette	67020415

MR 31 Plus Neo Rubber Corks

- Water and oil gasket
- Cork rubber products offer many of the advantages of rubber compounds along with the added benefit of controlled compressibility and recovery
- Highly compressible automotive and general purpose gasket material with moderate oil resistance



Product Code	Size	Part Number
110150	0.8 x 762 x 300mm Rollette	67012008
110153	1.5 x 762 x 300mm Rollette	67012015
110156	3.0 x 762 x 300mm Rollette	67012030
119254	1.5mm x 1.20m x 0.66m Sheet	67012040
119252	2.5mm x 1.20m x 0.66m Sheet	67012060
119253	3.0mm x 1.20m x 0.66m Sheet	67012080
119251	6.5mm x 1.20m x 0.66m Sheet	67012100

Klingersil® C4243

- Universal gasket material for general applications
- Suitable for liquids and gases at lower pressure and temperatures
- Good chemical resistance against water and oil
- Max. temperature: 100°C
- Max. pressure: 30bar
- Sheet size: 1.0 x 1.5m



Product Code	Thickness	Part Number	Product Code	Thickness	Part Number
767145	0.4mm	67032020	767126	2mm	67032080
767146	1mm	67032040	767128	3mm	67032100
767124	1.5mm	67032060	–	–	–

Klingersil® C4430

BS7531 Grade X

- AS4020 – Potable water
- A general purpose non-asbestos material offering good resistance to oils, fuels, hydrocarbons, alcohols, lubricants and steam as well as mild acids and alkalis
- Also available wire reinforced
- 3xA anti-stick finish as standard
- Max. temperature: 400°C
- Max. pressure: 40bar
- Sheet size: 2.0 x 1.5m



Product Code	Thickness	Part Number	Product Code	Thickness	Part Number
757245	0.4mm	67038101	757224	1.5mm	67038105
757221	0.5mm	67038102	757226	2.0mm	67038106
757246	0.8mm	67038103	757228	3.0mm	67038107
757222	1.0mm	67038104	–	–	–

Klinger® Softchem R

- A multi-directional, 100% expanded PTFE sheet gasket material
- The best choice for sealing uneven and damaged flanges
- Easy to cut and install and requires low compressive loads to seal
- Virtually compatible with all media across the PH range
- Max. temperature: 230°C
- Max. pressure rating: 40bar
- Sheet size: 1.5 x 1.5m



Product Code	Thickness	Part Number	Product Code	Thickness	Part Number
551150015	1.5mm	67038111	551150030	3.0mm	67038112

Wire Reinforced Steam Gaskets – TG2008

- TOPgraph 2008 sheet
- The flexible graphite sealing material with a high degree of inherent stability
- It has high load bearing capacity combined with high seal ability
- Ideally suited for use with steam and other critical applications
- Grade TG2008 is wire reinforced
- Max. temperature: 500°C
- Max. pressure: 100bar
- Sheet size: 1.0 x 1.5m




Product Code	Size	Part Number
562008108	0.8mm	67038020
562008110	1.0mm	67038025
562008115	1.5mm	67038040
562008120	2.5mm	67038050
562008130	3.2mm	67038060

Take a look
in the Hand &
Cutting Tools
section for
Wad Punches,
page 377



Compression Packing – K10

- Acrylic yarns impregnated with PTFE dispersion
- Economically priced general purpose white packing
- Suitable for use in valves and pumps with water, mild acids and alkalis
- Temperature range: -100°C–260°C
- Max. rotating speed: 10m/s
- Max. dynamic pressure: 30bar
- Max. static pressure: 100bar



1 Metre Roll					
Product Code	Size	Part Number	Product Code	Size	Part Number
191K10030M	3mm ²	67066020	191K10125M	12.5mm ²	67066140
191K10050M	5mm ²	67066040	191K10140M	14mm ²	67066160
191K10065M	6.5mm ²	67066060	191K10160M	16mm ²	67066180
191K10080M	8mm ²	67066080	191K10190M	19mm ²	67066200
191K10095M	9.5mm ²	67066100	191K10250M	25mm ²	67066250
191K10110M	11mm ²	67066120	–	–	–

8 Metre Roll					
Product Code	Size	Part Number	Product Code	Size	Part Number
191K10030	3.0mm ²	69067010	191K10125	12.5mm ²	69067015
191K10050	5.0mm ²	69067011	191K10140	14mm ²	69067016
191K10065	6.5mm ²	69067012	191K10160	16mm ²	69067017
191K10080	8.0mm ²	69067013	191K10190	19mm ²	69067018
191K10095	9.5mm ²	69067014	191K10250	25mm ²	69067019

Compression Packing – K54F

- A clean non-contaminating packing manufactured from pure PTFE filaments
- Suitable for use in plant wide applications for pumps and valves in virtually all strong acids and alkalis where a high level of resistance to chemical attack is required
- Portable water, food and oxygen service
- Temperature range: -240°C–260°C
- pH range: 0–14
- Max. rotating speed: 5m/s
- Max. static pressure: 200bar



8 Metre Roll					
Product Code	Size	Part Number	Product Code	Size	Part Number
191K54F030	3mm ²	69067041	191K54F125	12.5mm ²	69067046
191K54F050	5mm ²	69067042	191K54F160	16mm ²	69067047
191K54F065	6.5mm ²	69067043	191K54F190	19mm ²	69067048
191K54F080	8mm ²	69067044	191K54F220	22mm ²	69067049
191K54F095	9.5mm ²	69067045	191K54F250	25mm ²	69067050

Compression Packing – K11

- Acrylic yarns impregnated with graphite dispersion
- Economically priced general purpose black packing suitable for use in valves and pumps due to its low coefficient of friction
- The graphite enhances its chemical resistance allowing it to effectively seal many forms of chemical media commonly found within today's industrial environments
- Temperature range: -100°C–300°C
- Max. rotating speed: 20m/s
- Max. dynamic pressure: 30bar
- Max. static pressure: 100bar



1 Metre Roll					
Product Code	Size	Part Number	Product Code	Size	Part Number
191K11065M	6.5mm ²	69067021	191K11125M	12.5mm ²	69067023
191K11095M	9.5mm ²	69067022	–	–	–

8 Metre Roll					
Product Code	Size	Part Number	Product Code	Size	Part Number
191K11030	3.0mm ²	69067024	191K11125	12.5mm ²	69067030
191K11050	5.0mm ²	69067025	191K11140	14mm ²	69067031
191K11065	6.5mm ²	69067026	191K11160	16mm ²	69067032
191K11080	8.0mm ²	69067027	191K11190	19mm ²	69067033
191K11095	9.5mm ²	69067028	191K11250	25mm ²	69097034
191K11110	11mm ²	69067029	–	–	–

Compression Packing – K13DL

- Flax fibre packing incorporating our unique DOULON® lubricant
- Suitable for high speed centrifugal pumps handling salt, water, mild acid and alkali slurries
- Temperature range: 0°C–90°C
- Max. rotating speed: 15m/s
- pH range: 4–9



1 Metre Roll					
Product Code	Size	Part Number	Product Code	Size	Part Number
191K13DL030M	3mm ²	67062020	191K13DL110M	11mm ²	67062120
191KDL050M	5mm ²	67062040	191K13DL125M	12.5mm ²	67062140
191K13DL065M	6.5mm ²	67062060	191K13DL140M	14mm ²	67062160
191K13DL080M	8mm ²	67062080	191K13DL160M	16mm ²	67062180
191K13DL095M	9.5mm ²	67062100	191K13DL190M	19mm ²	67062200

8 Metre Roll					
Product Code	Size	Part Number	Product Code	Size	Part Number
191K13DL030	3mm ²	67062820	191K13DL125	12.5mm ²	67062940
191K13DL050	5mm ²	67062840	191K13DL140	14mm ²	67062960
191K13DL065	6.5mm ²	67062860	191K13DL160	16mm ²	67062980
191K13DL080	8mm ²	67062880	191K13DL190	19mm ²	67062985
191K13DL095	9.5mm ²	67062900	191K13DL250	25mm ²	67062990
191K13DL110	11mm ²	67062920	–	–	–

Compression Packing – K3222


- A high performance valve and pump packing for use in high pressure and high temperature applications
- Manufactured using expanded graphite ribbons to produce a fully flexible, conformable packing with excellent sealing characteristics
- Also available, wire reinforced for higher pressure applications
- Temperature range: -200°C–430°C (650°C in steam)
- Max. rotating speed: 20m/s
- pH range: 0–14
- Max. static pressure: 100bar



8 Metre Roll					
Product Code	Size	Part Number	Product Code	Size	Part Number
1913222030	3mm ²	67066989	1913222110	11mm ²	67066997
1913222050	5mm ²	67066991	1913222125	12.5mm ²	67066998
191K54F065	6.5mm ²	67066992	1913222140	14mm ²	67066999
1913222080	8mm ²	67066994	1913222160	16mm ²	67067000
1913222095	9.5mm ²	67066995	1913222190	19mm ²	67067200

Slurry Pump Packing – K4333

- Polyimide fibre with PTFE lubricant
- Suitable for water, oils, hydrocarbons, mild acids and alkalis
- A good slurry packing in the pulp, paper and sugar industries
- Max. temperature: 260°C
- Max. rotating speed: 15m/s
- pH range: 1–12

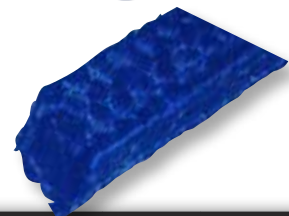

1 Metre Roll					
Product Code	Size	Part Number	Product Code	Size	Part Number
1914333065M	6.5mm ²	67070060	1914333140M	14mm ²	67070160
1914333095M	9.5mm ²	67070100	1914333160M	16mm ²	67070180
1914333125M	12.5mm ²	67070140	1914333200M	20mm ²	67070200

8 Metre Roll					
Product Code	Size	Part Number	Product Code	Size	Part Number
1914333065	6.5mm ²	67070560	1914333140	14mm ²	67070660
1914333095	9.5mm ²	67070600	1914333160	16mm ²	67070680
1914333125	12.5mm ²	67070640	1914333190	19mm ²	67070700

Packing Extractors & Gasketing Sealant

Klinger® Sealex

- Manufactured from 100% virgin PTFE by a unique process
- The resulting product is soft, compressible and highly conformable self adhesive sealing tape
- The best choice for sealing uneven, thin and damaged flanges
- Ideal as an emergency gasket or economical solution to sealing large diameter flanges and tank lids
- It is easy to cut to length and install and requires low compressive loads to seal
- Compatible with all media across the pH range
- Max. temperature: 260°C
- Max. pressure rating: 50bar



Product Code	Thickness x Length	Part Number	Product Code	Thickness x Length	Part Number
886803	3mm x 30m	67038131	886813	12.5mm x 5m	67038135
886805	5mm x 23m	67038132	886816	16mm x 5m	67038136
886806	7mm x 15m	67038133	886819	19mm x 5m	67038137
886810	10mm x 7.5m	67038134	886820	25mm x 5m	67038138

Flexible Packing Extractors

- High quality packing extractors for use on pumps, valves and other static applications
- Assist in total removal of gland packing without damaging the shaft or the stuffing box
- Flexible shaft is ideal for extracting packing from awkward and hard to reach positions
- Replacement tips available



Product Code	Description	To Suit Packing	Part Number
191001	Size 1	6.5–9.5mm	67074015
191002	Size 2	9.5–12.5mm	67074020
191003	Size 3	12.5–16.0mm	67074025
191004	Size 4	16.0mm	67074028
K0036075/1	4 Piece Extractor Set		67074030
191005	Replacement Tip to Suit Size 1 Hook		67074229
191006	Replacement Tip to Suit Size 2 Hook		67074228
191007	Replacement Tip to Suit Size 3 Hook		67074230



For Inside & Outside Spring Joint Calipers, go to the Hand & Cutting Tools section, page 352

Gasketing Sealant

- Loctite Flange Sealants can be used to replace gaskets or help gaskets seal
- Loctite Anaerobic Flange Sealants are ideal for small gaps on rigid flanges
- Loctite Silicone Flange Sealants suit gaps up to 6mm on flexible gasket faces and offer outstanding oil resistance
- Loctite Maxx silicones are neutral cure (prevent corrosion), sensor safe and exhibit outstanding hot oil resistance



Product Code	Description	Max. Gap Fill	Temperature Range	Size	Part Number
45077	Loctite 510 Gasket Eliminator® – Rigid anaerobic gasketing material for high temp, high chemical resistance. Suitable for highly stressed gearboxes & motors. Adds structural rigidity & eliminates gasket compression set	0.25mm	-54 to 200°C	50ml	32412180
45082				250ml	32412190
51531A	Loctite 515 Master Gasket® – Flexible anaerobic gasketing material for rigid, machined metal flanges. Eliminates paper, rubber & cork gaskets. Used for pumps, thermostat housings, transmission covers, etc	0.5mm	-54 to 150°C	50ml	32412200
33530				300ml	32412210
51827	Loctite 518 Gasket Eliminator® – Flexible anaerobic gasketing material for alloy parts. For sealing rigid metal flanges against leakage & movement. Recommended for alloy flanges e.g. aluminium gearbox & engine castings	0.25mm	-54 to 150°C	25ml	32412220
51845				300ml	32412230
34848	Loctite 587 Blue Maxx® Silicone – Non-corrosive, low odour, highly flexible, oil resistant, sensor safe. Ideal for inspection covers & gear boxes & where movement causes failure of regular gaskets	6mm	-60 to 260°C	95g	32412270
34888				300ml	32412272
59630	Loctite 596 Superflex® Red – RTV Silicone Sealant – High temperature, viscous, low volatile product, emits small amounts of acetic acid during cure. Sensor safe. Applications include inspection plates, boilers, exhaust ducts, etc. Replaces cork or rubber	6mm	-60 to 315°C	80ml	32412280
20166	Loctite 5900 Heavy Bodied Silicone – Outstanding oil resistance. Fast cure, resists blow-out. Neutral cure, sensor safe. Replaces cork and paper, suits stamped metal covers, sumps, etc.	6mm	-54 to 232°C	300ml	32420235
30517	Loctite Aviation Gasket Sealant – Reliable, liquid gasket sealant, dressing, & coating. Thin brushable dressing or sealer for close-fitting parts. Approved for use in aviation as well as automotive applications. Resists gasoline, oil & grease	0.1mm	-54 to 205°C	118ml	32412045
30511	Loctite #1 Gasket Sealant – Fast drying, hard setting, full rigid cure after 24 hours. Resistant to gasoline & other solvents. For use on threaded connections, air ducts & plumbing connections	0.2mm	-54 to 205°C	85g	32412010
30514	Loctite #2 Gasket Sealant – Non-hardening, slow dry, flexible cure. Compatible with: cork, metal, plastic & rubber	0.1mm	-54 to 205°C	85g	32412020
3JA	Loctite #3 Aviation Gasket Sealant – Slow drying, non-hardening solvent sealant.	0.1mm	-54 to 205°C	50ml	32412050
30516	Suitable for close fitting machined surfaces, sealing hoses & dressing gaskets			473ml	32412040
4J	Loctite #4 Hard Setting Gasket Cement – Hard setting bottle, petrol & oil resistant. For threaded connections, manifold, coating differential cover, thermostat housing & water pump gaskets	0.2mm	-55 to 170°C	50ml	32412060

Bearing Blue

- High colour marking aid
- Easily spreadable and does not clog or dry out
- 25g tube



32226030

Hylomar Universal Blue Jointing Compound

- Non-setting gasket and sealing compound
- Polyester urethane based
- Typically used for sealing metal to metal and plastic to plastic
- Can be used to seal joint faces or threaded parts
- Resistant to a wide range of fluids including fuels, oils, water, brine, kerosenes and more
- Temperature range: -50–250°C
- 100g tube



32418030

Hylomar Gasket Jointing Compound

- Sealing adhesive spray
- Withstands high temperatures
- Resistant to most fuels
- Suitable for use on most gaskets and metals, sumps, pumps, valves, hydraulic and pneumatic assemblies, gearboxes, cylinder heads and axles
- 300g aerosol



32418050

Stag Jointing Compound

- An oil-proof, petrol-proof and waterproof anti-corrosive compound
- Suitable for air and steam lines, diesel engines and hydraulic equipment



Size	Part Number
200g Tube	32418060
400g Tin	32418070

Molykote 111 Valve & O-Ring Compound

- For control and pressure plug valves, water softener and faucet valves
- Suitable for rubber and plastic parts
- Sealant for vacuum, pressure systems and some outdoor equipment
- Damping medium for dash pots in electrical and electronic equipment
- Anti-stick and sealant for gaskets
- Weather and water resistant
- Has a low vapour pressure and volatility
- Composition: silicone oil, inorganic thickener, additives
- Temperature range: -40°C–200°C
- Translucent white colour
- 120g tube



32610170

"O" Ring Kits

Champion
FASTENERS



Product Code	Description	Part Number
CA115	Imperial Size "O" Rings – 115 Pieces – 70 S – Nitrile 14 Sizes: 3/16 to 1" I.D.	40410180
CA407	Imperial Size "O" Rings – 407 Pieces – 70 S – Nitrile 32 Sizes: 1/8 to 2" I.D.	40410450
CA116	Metric Size "O" Rings – 130 Pieces – 70 S – Nitrile 15 Sizes: 5 to 25mm I.D.	40410190
CA408	Metric Size "O" Rings – 408 Pieces – 70 S – Nitrile 32 Sizes: 3 to 50mm I.D.	40410460

Splicing "O" Ring Cord Kits

Champion
FASTENERS

CA410

- Metric
- Nitrile
- 9 sizes: 1.5 to 8.5mm
- 900mm long



40410470



Bishops Stock & Sell:

- Clothing & Footwear
- Safety Equipment & Consumables
- Material Handling & Lifting Equipment
- Hand & Cutting Tools
- Welding & Abrasives
- Power & Pneumatic Tools
- Machinery & Construction Equipment
- Lubricants, Sealants & Chemicals
- Janitorial & Hygiene Products
- General Industrial Products
- Fasteners
- Bearings, Seals & Transmission Products
- Hydraulics, Valves, Hoses & Fittings
- Offshore Oil & Gas Products

With access to over 200,000 products, Bishops have everything you need. See in store today.



Sales & Service

PORT MORESBY
LAE
KIMBE
MADANG

325 1088
472 3799
983 5500
422 1344

MT HAGEN
KOKOPO
HONIARA –
SOLOMON ISLANDS

545 1990
982 9911
(677) 30047

sales@bishopbros.com.pg
www.bishopbros.com.pg

A

Accelerator

Primer 198

Acids & Chemicals

Methylated Spirits 191

Thinners 192

Turpentine 191

Acrylic

Adhesive 199

Adhesives

Assembly 195

Construction 195

Contact 196

Damp Surfaces 200

Epoxy 199

Gasketing 206

Instant 196, 197

Multi-purpose 195

Plastic 196, 197, 199

Primer 199

PVA Wood Glue 196

Retaining Compound 198

Silicone Sealant 193

Threadlocker 198

Thread Sealant 197

Windscreen 195

Aerostart

Engine 187

Air

Cleaner 186

Tool Oil 179

Tool Oil – Breaker & Hammer 179

Air Operated

Grease Gun 168

Grease Pump 170

Grease System 169

Oil Pump 173

Alcohol

Methylated Spirits 191

Anchor

Adhesive 195

Anti-Corrosive

Compound 191

Lubricant 185

Anti-Seize

Compound 183

Anti-Spatter

Welding Lubricant 191

Assembly

Adhesive 195

Anti-Seize Compound 183

Wet Film Spray 182

Automotive

Aerostart 187

Body Filler 199

Brakes & Parts Cleaner 188, 189

Cleaner 186, 188

Electronic Cleaner 186

Oil 179, 180

Sealant 194

Silicone Lubricant 186

Stop Leak 189

Tyre Care 189

Axle

Oil 180

B

Bandages

Pipe Repair 201

Barrel

Pump Cast Iron 175

Battery

Grease Gun 168

Maintenance 187

Terminal Protector 187

Bearing

Blue Grease 207

Lubricant 182

Belt

Grip 187

Brake

Cleaner 188, 189

De-Squeak 188

Brushable

Ceramic 200

Bucket

Greaser 169

Bushing

Anti-Seize Compound 183

Butyl

Primer 202

C

Cable

Grease 182

Can

Oil 172

Cartridge

Grease 181

Caulking

Gun 196

Cement

Exhaust 194

PVC Pipe Solvent 197

Ceramic

Adhesive 199

Brushable 200

Ceramic Shield

Welding Lubricant 191

Chain

Lubricant.....	182, 185
Oil.....	179

Chemical

Pump.....	174
-----------	-----

Chemicals & Acids

Methylated Spirits	191
Thinners.....	192
Turpentine.....	191

ChemSet

Applicator	196
------------------	-----

Cleaners

Acetone.....	192
Battery.....	187
Brake & Parts.....	188, 189
Carburettor.....	189
Contact.....	186
Degreaser.....	188, 189
Electrical.....	186, 187
Methylated Spirits	191
Parts.....	189
Thinner.....	191, 192

Cleaning

Anti-Spatter	191
--------------------	-----

Coatings

Ceramic.....	200
Dry Film.....	182

Compounds

Anti-Corrosive	191
Anti-Seize	183
Combowear.....	200
Cutting.....	190
Gasket Jointing.....	207
Jointing.....	207
Lapping.....	191
O-Ring.....	207
Putty.....	200
Retaining.....	198, 199
Valve.....	207
Valve Grinding.....	190
Wear Guard.....	200

Compression

Packing.....	205
--------------	-----

Compressor

Oil.....	180
----------	-----

Construction

Adhesive.....	195
Sealant.....	193

Contact

Adhesive.....	196
Cleaner.....	186

Control Valves

Grease Gun.....	170
-----------------	-----

Coolant

Radiator.....	189
---------------	-----

Copper

Anti/Stop – Seize	183
-------------------------	-----

Cord

O-Ring.....	207
-------------	-----

Cordless

Grease Guns.....	168
------------------	-----

Cordless Power Tools

Grease Gun.....	168
-----------------	-----

Cork

Rubber Gasket.....	204
--------------------	-----

Corrosion

Penetr8.....	187
--------------	-----

Corrosion Protection

Dry Film.....	182
Penetrant.....	187

Couplers

Button Head.....	171
Hydraulic.....	171

Crack

Detection Kit.....	201
Test.....	201

CRC

Aerostart.....	187
Battery Terminal.....	187
Belt Grip.....	187
Cleaner.....	186
Clean-R-Carb.....	189
Degreaser.....	186, 188
Exhaust Cement.....	194
Freeze Spray.....	188
Gasket Stripper.....	188
Industrial.....	184
Lubricant.....	184, 185, 186
Penetrant.....	187
Soft Seal.....	187
Tyre Protectant.....	189
Urethane Seal Coat.....	187

Cutting

Compound.....	190
Fluid.....	190
Oil.....	190

D**Degreaser**

Acetone.....	192
Contact.....	186
Electronic.....	186

Denso

Mastic.....	203
Membrane.....	203
Primer.....	202
Rockmesh.....	203
Tape.....	201, 202

Devcon

Brushable Ceramic.....	200
Putty – Repair.....	199, 200

Diaphragm

Fuel Transfer Pump.....	176
-------------------------	-----

Diesel

Control Nozzle	178
Engine Oil.....	180
Fuel Filter	176
Meter	177
Pump.....	173, 174, 175, 178
Storage & Dispensing Kit.....	178
Tanks	177
Water Separator.....	177

Differentials

Oil	180
-----------	-----

Disinfectants

Methylated Spirits	191
--------------------------	-----

Dispensing

Kits	178
------------	-----

Drum

Diesel Pumps.....	176
Gear Oil Pump	173
Pump.....	173, 175

Dual

Transfer Gun	166
--------------------	-----

E**Electric**

Cleaner	186
Freeze Spray.....	188
Fuel Meter	177
Fuel Pump	176
Lubricant Shield	186
Oil Meter	177
Sealant.....	194
Urethane Seal Coat.....	187

Element

Filter.....	176, 177
-------------	----------

Engine

Aerostart	187
Diesel Oil.....	180
Oil	179, 180

Epoxy

Adhesive	199
Plastic Steel	199
Wear Guard	200

Exhaust

Cement.....	194
-------------	-----

Extractors

Flexible Packing	206
------------------------	-----

F**Fibreglass**

Adhesive	199
Lagging Rope	203
Lagging Tapes.....	203
Repair Kit.....	199

Filler

Body	199
Gap	192, 193
Interior Powder	193
Wood.....	192

Filter

Diesel & Kerosene.....	176
Element.....	177
Fuel.....	174, 176
Water Separator.....	177

Flange

Anti-Seize Compound	183
Sealant.....	206
Sealing Tape	204

Flawfinder

Crack Test.....	201
-----------------	-----

Flow

Meter	177
-------------	-----

Fluid

Cutting.....	190
--------------	-----

Foam

Expanding.....	192
----------------	-----

Foot Operated

Grease Pump.....	169
------------------	-----

Fuel

Control Nozzle	178
Filter.....	176
Meter	177
Nozzle.....	178
Pump.....	173, 174, 175
Refuelling Kit	178
Storage & Dispensing Kit.....	178
Transfer Pump.....	176

G**Gap**

Filler	193
--------------	-----

Gaskets

Jointing Compound	207
Paper.....	204
Rubber Corks	204
Rubber Insertion	203
Sealant.....	194, 206, 207
Sealing Tape	204
Sheet	204
Silicone	194, 206
Steam	204
Stripper.....	188

Gauge

Thread Tester – Grease Fitting.....	172
-------------------------------------	-----

Gear

Oil Pump.....	172, 174
---------------	----------

Gears – Open

Spray	182
-------------	-----

Glass

Cleaner – Methylated Spirits.....	191
-----------------------------------	-----

Glues

Adhesive	196, 197
PVA.....	196
Wood.....	196

Grab Kits

Grease Nipples	172
O-Rings	207

Graphite

Gasket Material	205
Powder	181

Grease

Bearing Blue	207
Cartridge.....	181
Control Valve.....	170
Couplers	171
Fittings	171
Fluid Wire Rope.....	182
Gadus.....	181
Gun.....	167
Gun Holder	168
Hoses	171
Lubricators.....	170
Multi-Purpose	181
Nipples	171, 172
Pumps	169, 170
Rubber.....	182
Transfer Pump.....	169
Type A.....	181
Wire Rope.....	182

Grease Fittings

Couplers	171
Nipples	171, 172
Thread Tester	172

Grease Guns

Air Operated	168
Battery Operated – Cordless.....	168
Holder.....	168
Lever Type	167, 168
Pistol.....	167
Push Type	167

Grease Pumps

Air Operated	170
Foot Operated	169
Transfer	169

Greasing Equipment

Control Valve.....	170
Couplers	171
Greasing System.....	169
Gun Holder	168
Gun – Lever Type	168
Hoses	171
Lubricators.....	170
Pumps	169, 170
Thread Tester	172

Grinding

Valve Compound.....	190
---------------------	-----

Guns

Caulking.....	196
Dual Direction Transfer	166
Grease	167, 168

Grease – Control Valve.....	170
Grease – Holder.....	168
Oil Control.....	174
Suction	166

H**Hammer**

Air Tool Oil.....	179
-------------------	-----

Header Block

Grease Nipple Kit	172
-------------------------	-----

Holder

Grease Gun	168
------------------	-----

Hoses

Grease	171
Hydraulic Rubber	174

Hydraulic

Couplers – Grease	171
Hoses	174
Oil	179
Sealant.....	197

I**Insertion**

Rubber.....	203
-------------	-----

Instant

Adhesive	196, 197
----------------	----------

Interior

Filler Powder	193
---------------------	-----

J**Jointing**

Compound.....	207
Sealant.....	195

K**Kerosene**

Fuel Filter	176
-------------------	-----

Kits

Brushable Ceramic.....	200
Crack Detection	201
Diesel Storage & Dispensing	178
Elastomeric Membrane Topcoat.....	203
Fibreglass Repair	199
Fuel Storage & Dispensing	178
Grease Gun	167
Grease Nipples	172
Header Block	172
O-Ring	207
Pipe Repair	201
Refuelling	178
Wood Glue.....	196

L

Lacquer

Thinners..... 192

Lanolin

Lubricant..... 184

Release Agent..... 183

Lapping

Compound..... 191

Lever

Plastic Pump..... 166

Lever Type

Grease Guns..... 167, 168

Oil Can..... 172

Liquid

Nails Adhesive..... 195

Loctite

Adhesive..... 196, 197

Anti-Seize..... 183

Ceramic Shield..... 191

Epoxy Adhesive..... 199

Fixmaster..... 200

Gasket Sealant..... 206

Primer..... 198, 199

Retaining Compounds..... 198

Steel Compound/Putty..... 200

Threadlocker..... 198

Thread Sealant..... 197

Lubricants

Anti-Seize..... 183

Assembly..... 182

Bearing..... 182

Chain..... 179, 182, 184, 185

CRC..... 184, 185

Cutting..... 190

Dry..... 181

Electrical..... 184, 186

Greases..... 181, 182

Greases – Wire Rope..... 182

Lanolin..... 184

Marine..... 185

Multi-Purpose..... 184

Oil – Air Tool..... 179

Oil – Assembly..... 182

Oil – Chain..... 179, 182

Oil – Compressor..... 180

Oil – Engine..... 179, 180

Oil – Hydraulic..... 179

Oil – Open Gear..... 182

Oil – Two Stroke..... 179

Release Agent..... 183, 185

Silicone..... 184, 185, 186

Soft Seal..... 187

WD-40..... 184

Wire Rope..... 182

Lubrication Equipment

Accessories..... 170, 172

Grease Control Valve..... 170

Grease Guns..... 167, 168

Grease Pumps..... 169, 170

Grease System..... 169

Lubricator..... 170

Oil Can..... 172

Oil Control Guns..... 174

Oil Meter..... 174

Oil Pumps..... 172, 173, 174

Lubricators

Grease..... 170

M

Magnetic

Crack Test..... 201

Marine

Adhesive..... 195

Lubricant..... 185

Sealant..... 195

Tape Piling..... 202

Master Kits

Grease Nipples..... 172

O-Rings..... 207

Mastic

Super-Light Profiling..... 203

Membrane

Denso..... 203

Mesh

Rockmesh..... 203

Metal

Cutting Compound..... 190

Meters

Diesel..... 177

Flow..... 177

Fuel..... 177

Oil..... 177

Methylated

Spirits..... 191

Mineral

Turpentine..... 191

N

Nails

Liquid Adhesive..... 195

Neo Rubber

Cork – Gasket..... 204

Nickel

Anti/Stop-Seize..... 183

Nipples

Grease..... 171, 172

Grease – Thread Tester..... 172

Nozzle

Fuel Control..... 178

O

Oil

Air Tool.....	179
Assembly.....	182
Can.....	172
Chain.....	179, 182
Compressor.....	180
Control Gun.....	174
Cutting.....	190
Engine.....	179, 180
Hydraulic.....	179
Meter.....	177
Open Gear.....	182
Pumps.....	172, 173, 174, 177
Tank.....	177
Transfer Pump.....	177
Transmission.....	180
Two Stroke.....	179

Open Gear

Spray.....	182
------------	-----

O-Ring

Compound.....	207
Kits.....	207

P

Packing

Compression.....	205
Extractors.....	206
Slurry Pump.....	205

Paint

Crack Test.....	201
Methylated Spirits.....	191
Mineral Turpentine.....	191
Stripper.....	192

Paint Brush

Cleaner.....	191
--------------	-----

Paper

Gasket.....	204
-------------	-----

Parts

Cleaner/Degreaser.....	188, 189
------------------------	----------

Penetrants

Corrosion/Rust.....	184, 187, 191
---------------------	---------------

Petrol

Meter.....	177
Nozzle.....	178

Petrolatum

Tape.....	201
-----------	-----

Pipe Repair

Bandages.....	201
---------------	-----

Pistol

Grease Gun.....	167
-----------------	-----

Piston

Pump.....	173
-----------	-----

Plastic

Adhesive.....	196, 199
Repair/Putty.....	199, 200
Steel Putty.....	199, 200
Welder.....	199

Plumbing

Silicone.....	193
---------------	-----

Pneumatic

Tool Oil.....	179
---------------	-----

Polyurethane

Foam.....	192
Sealant.....	195

Powder

Graphite.....	181
---------------	-----

Primer

Adhesive & Sealant.....	198, 199
Butyl.....	202
Denso.....	202
Hi Tack.....	203
Loctite.....	198, 199

Pumps

Air Operated.....	173
Chemical.....	174
Composite Air Operated Grease.....	170
Diesel.....	173, 175
Fuel.....	173, 174, 176
Fuel Electric.....	176
Grease.....	169, 170
Oil.....	172, 173, 177
Oil Transfer Tank.....	177
Plastic Lever.....	166
Ratio Air Operated.....	170
Rotary.....	173, 175, 178
Spout for Rotary.....	176
Syphon.....	166

Push Type

Grease Gun.....	167
-----------------	-----

Putty

Plastic Steel.....	199, 200
Repair.....	200
Titanium.....	200

PVC

Adhesive.....	199
Glue.....	196
Overwrap Tape.....	201
Pipe Cement.....	197

R

Radiator

Coolant.....	189
Stop Leak.....	189

Rapp-it

Pipe Repair Bandage.....	201
--------------------------	-----

Refuelling

Kit.....	178
----------	-----

Release Agents

Lubricant.....	185
----------------	-----

Repair Products

Brushable Ceramic.....	200
Fibreglass Kit	199
Pipe Bandages	201
Putty	199, 200

Retaining

Compound.....	198
Compound Primer	198, 199

Rockmesh

Denso	203
-------------	-----

Rocol

Grease	182
Lubricant.....	182

Roof/Gutter

Silicone	193
----------------	-----

Rope

Fibreglass Lagging	203
Wire – Grease/Lubricant.....	182

Rotary

High Flow Fuel Pump	175
High Speed Pump.....	175
Pump.....	173, 174, 175

Rubber

Grease	182
Hydraulic Hoses.....	174

Rust

Prevention Tape	202
-----------------------	-----

S

Sealants

Adhesive	193
Electrical	194
Gasket	194, 206
Heat Resistant	194
Marine.....	195
Multi-purpose.....	193, 194, 195
Primer.....	199
Roof & Gutter.....	193
Silastic	194
Silicone Adhesive	193
Soft Seal	187
Tank.....	195
Thread	197
Windscreen.....	195

Sealing

Tape.....	204
Thread Tapes	197

Separator

Filter Water	177
--------------------	-----

Sheet

Graphite.....	204
Rubber.....	203

Shell

Engine Oil.....	180
Grease	181
Oil	179, 180

Rimula.....	180
-------------	-----

Silastic

Electrical Sealant.....	194
Gasket Sealant.....	194
Heat Resistant	194
Marine Sealant	195
Sealant.....	194
Sealant Auto	194
Windscreen Sealant	195

Silicone

Adhesive Sealant	193
Gasket	194, 206
Lubricant.....	184, 185, 186
Plumbing.....	193
Rhodorseal	194
Roof & Gutter.....	193

Slurry

Pump Packing	205
--------------------	-----

Soft Seal

Anti-Rust.....	187
----------------	-----

Solvents

Mineral Turpentine.....	191
Multi-purpose.....	195
Paint Stripper	192
Plastic Wood Filler.....	192
PVC Pipe Cement.....	197
Thinners.....	192

Spirits

Methylated	191
------------------	-----

Spout

Rotary Pump.....	175
------------------	-----

Sprays

Anti-Rust.....	185
Chain	182
Lubricant.....	184, 185, 186
Lubrication	187
Open Gear.....	182
Silicone	185, 186
Slipicione Release	185
Wet Film Assembly.....	182
Wire Rope.....	182

Steam

Gaskets	204
---------------	-----

Steel

Adhesive.....	199
Repair Putty	199, 200

Stihl

2 Stroke Oil	179
Chain Oil	179

Stop-Seize

Compound.....	183
---------------	-----

Storage

Fuel.....	178
-----------	-----

Stripper

Paint	192
-------------	-----

Stroke

Oil – Two	179
-----------------	-----

Structural

Adhesive.....	199
---------------	-----

Index

Suction

Gun..... 166

Super Glue

Adhesive..... 196, 197

Swivel

Hydraulic Coupler 171

Syphon

Pump..... 166

System

Greasing 169

T

Tanks

Diesel Storage & Dispensing Kit 178
Oil Transfer Pump..... 177
Sealant..... 195, 200
Twin Skinned..... 178

Tapes

Fibreglass Lagging 203
Hi Tack..... 202
Marine Piling 202
Petrolatum 201
PVC Overwrap 201
Rust Prevention..... 202
Sealing – Flange..... 206

Terminal

Battery Protector..... 187

Testers

Crack..... 201
Thread – Grease Nipples..... 172

Thinners

Paint 192
Solvent & Cleaner..... 191, 192

Thread

Lockers..... 198
Sealants..... 198
Sealing Tapes..... 197

Thread Tester

Grease Fitting..... 172

Threadlocker

Loctite..... 198
Primer..... 198, 199

Tip

Packing Extractor..... 206

Titanium

Repair – Putty 200

Transfer

Dual Direction Gun 166
Fuel Pump 176
Grease Pump..... 169
Oil Pump..... 177

Transmission

Oil 180

Trigger Type

Grease Gun 167

Turpentine

Mineral 191

Two Stroke

Engine Oil..... 179

U

Urethane

Putty 200
Seal Coat..... 187

V

Valves

Anti-Seize Compound 183
Grease Control..... 170
Grinding Compound 190

W

Waste

Oil Tank..... 178

Water

Diesel Filter Separator 177

WD-40

Lubricant..... 184

Wear Guard

Epoxy 200

Welder

Plastic..... 199

Welding

Anti-Spatter 191
Ceramic Shield..... 191
Crack Test..... 201

Wet Film

Assembly Spray 182

Windscreen

Adhesive/Sealant 195
Silastic Sealant..... 195

Wire Rope

Grease/Lubricant 182

Wood

Adhesive 195, 196, 199
Filler 192
Glue 196